



# INTRODUCING THE ORLANDO

**A BEAUTIFULLY STYLED  
CONTEMPORARY LEVER THAT  
WILL ENHANCE ANY DÉCOR**

## Offered in both Mortise and Cylindrical Locks

- MR Mortise Series
  - J and JW Trim
  - 630 (US32D) Stainless Steel
- TJ Apartment Series
  - 630 (US32D) Stainless Steel
- SD Cylindrical Lock Series
  - 605 (US3) Bright Brass, 613 (Dark Oxidized Satin Bronze, Oil Rubbed), 626 Satin Chrome

**Cross reference to Schlage® Latitude**



**For more information or to order products,  
contact your local Sales Representative  
or PDQ Customer Service at 800.441.9692.**




Headquarters: 2754 Creek Hill Road • Leola, PA 17540 • 800.441.9692 • 717.656.6892 Fax  
Regional Distribution Centers: Kansas City, MO, Salt Lake City, UT, Seattle, WA, Denton, TX  
[www.pdqlocks.com](http://www.pdqlocks.com)

# ORLANDO LEVER SUBMITTAL SHEET


ASSEMBLED IN USA  
**GRADE 1**  
**MR**  
 EXTRA HEAVY DUTY  
**SERIES**  
 MORTISE LOCK



**ORLANDO (ORL)**



**J SERIES SECTIONAL**

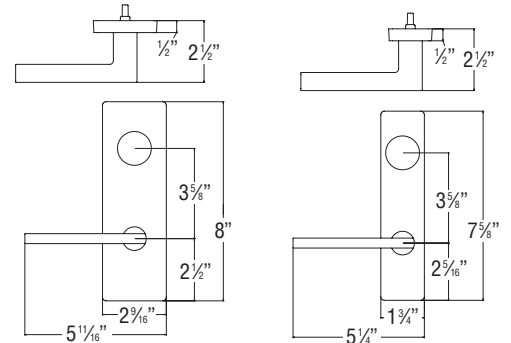

**J SERIES WIDE ESCUTCHEON**

**J SERIES ESCUTCHEON**

## SPECIFICATIONS

**FOR DOORS:**

**BACKSET:**

**CASE:**

**ARMOR FRONT:**

**STRIKE:**

**LATCHBOLT:**

**DEADBOLT:**

**HAND:**

**TRIM:**

**KEYS:**

**KEYWAYS:**

**INTERCHANGEABLE CORE:**

**CYLINDER:**

**KEYING:**

**FINISHES:**

**CERTIFICATIONS, LISTINGS  
 COMPLIANCES:**

**WARRANTY:**

**COUNTRY OF ORIGIN:**

- 1-3/4" standard, 2" and 2-1/4" special order from factory.
- 2-3/4" standard. • 3-3/4" and 5" optional.
- 13-gauge cold rolled steel mechanism • Dichromated for corrosion resistance
- Beveled 1/8" on 2" • 630 (US32D) use stainless steel as base material
- Handed Curved Lip Strike • 630 (US32D) use stainless steel as base material
- 3/4" Throw • Investment Cast Stainless Steel
- Anti-friction
- 1" Throw • Investment Cast Stainless Steel
- Most functions field reversible. Specify handing for strikes, consult factory for details
- **J & JW trim** - stainless steel escutcheon, tube lever.
- Two (2) per Lock
- SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
- 6 or 7-pin • Compatible with Best, Falcon & Arrow
- Large Format IC Cores compatible with Schlage.
- 6 or 7-pin Brass Mortise Cylinder
- Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)  
 Can be keyed into existing master key systems
- 630 (US32D)
- Antimicrobial Coating available

- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA 156.13-2005 **Operational Grade 1 and Security Grade 1**
- **Windstorm Rated** - Florida Building Code listed FL3262, ANSI A250.13, ASTM E1886, ASTM E330, Outswing: 350 ft-lbs., Inswing: N/R, Design Load Rating: 2453 lbf. (functions with deadbolts only)
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- JW Wide Escutcheon Trim complies with Unified Facilities Guide Specification 08 71 00 (August 2008)
- Lifetime Limited Warranty
- Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

‡ Available with antimicrobial powder coating, treated with silver ionic technology that is known to inhibit the growth of microbes.




# ORLANDO LEVER SUBMITTAL SHEET

## TJ APARTMENT SERIES



**ORLANDO (ORL)**

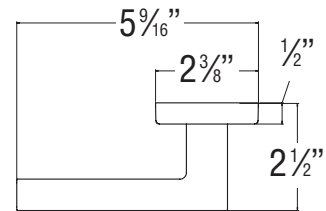

### SPECIFICATIONS

**FOR DOORS:**

- For doors 1-3/8" (35mm) to 1-3/4" (44mm) thick standard

**BACKSET:**

- 2-3/4" (70mm) standard Optional: 2-3/8" (60mm);

**STRIKE:**

- "Full Lip" Strike — 1-5/8" x 2-1/4" x 3/32" Standard

**ROSE:**

- Rose Diameter 2-3/8"

**DOOR PREP:**

- ANSI Standard 161 Door Prep
- 160 door prep optional

**LATCH BOLTS:**

- 2-3/4" b/s has 1 1/8 faceplate. 2-3/8" b/s is 1"

**HAND:**

Non-handed

**FINISHES:**

- 630 (US32D)
- Antimicrobial Coating available

**TRIM:**

- Stainless Steel Levers and roses

**CERTIFICATIONS, LISTINGS  
COMPLIANCES:**

- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings

**WARRANTY:**


- Five (5) year limited warranty

# ORLANDO LEVER SUBMITTAL SHEET

## GRADE 2 SD COMMERCIAL SERIES CYLINDRICAL LOCK



**ORLANDO (ORL)**

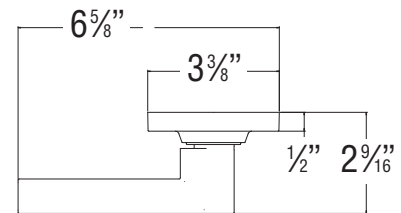

### SPECIFICATIONS

**FOR DOORS:**

**APPLICATION:**

**BACKSET:**

**CHASSIS:**

**FRONT:**

**STRIKE:**

**LATCHBOLT:**

**HAND:**

**TRIM:**

**KEYS:**

**KEYWAYS:**

**INTERCHANGEABLE CORE:**

**CYLINDER:**

**KEYING:**

**FINISHES:**

**CERTIFICATIONS, LISTINGS  
COMPLIANCES:**

**WARRANTY:**

- 1-3/8" to 1-3/4" thick
- Preset for 1-3/4" door
- Through door thru-bolting
- Fits standard 160 and 161 Door prep
- Thru-Bolts are removable
- 2-3/4" standard
- 2-3/8" optional
- Heavy-gauge cold rolled steel mechanism
- Dichromated for corrosion resistance
- 2-1/4" x 1-1/8" or 2-1/4" x 1"
- Beveled 1/8" on 2"
- Stainless Steel or Wrought Brass
- ASA standard
- T-Strike or Full Lip Strike optional
- Stainless Steel or Wrought Brass
- 1/2" Throw
- Non-handed
- Solid Zinc diecast
- Wrought Brass Roses
- Concealed Screws
- Two (2) per Lock
- SCC standard (Schlage C Compatible)
- Also available in keyways of other manufacturers
- 6 or 7-pin
- Compatible with Best, Falcon & Arrow / Not available with Memphis trim
- 6-pin Brass Insert Cylinder keyed to 5-pins
- Options: MK, CMK or GMK / Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
- Can be keyed into existing master key systems
- 605 (US3), 613 (US10B), 626 (US26D)

- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA A156.2-2003 Grade 2
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
- Meets requirements of the Buy American Act.
- Five (5) year Limited Warranty

‡ Available with antimicrobial powder coating, treated with silver ionic technology that is known to inhibit the growth of microbes.