



106S

Adjustable Silicone Perimeter Seal

PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer
Silicone Is Black


- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F To 300°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold and Energy Performance
- Adjustment Screws on 10" Centers Allow Adjustment Without Re-Positioning Mounting Location
- #6 x 3/4" or #6 x 1 1/2" Stainless Steel SMS Furnished

Finishes

106SA Anodized Aluminum
106SB Black Anodized
106SDKB Dark Bronze

Options

FATT - Fast Attach Tape

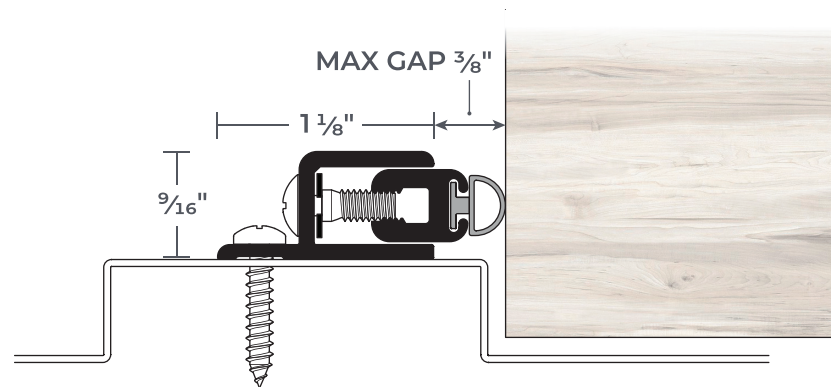

NGP-GKT-106S-PCS-0626-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH