

# NEOPRENE SPONGE SEALS

All Products on This Page:



- Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell Advanced Elastomeric Foam
- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment
- Patent Pending Microcellular EPDM


## 108NA

Anodized Aluminum  
Neoprene Sponge  
Seal




| PRODUCT#   |                              |
|------------|------------------------------|
| SUFFIX     | FINISH                       |
| <b>A</b>   | Anodized Aluminum            |
| <b>DKB</b> | Dark Bronze / Black Anodized |

Neoprene is Black

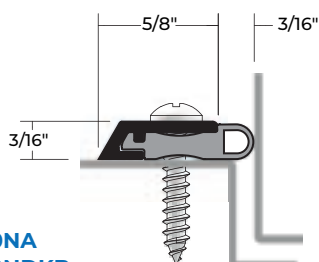


**110NA**  
**110NDKB**

Patent Pending

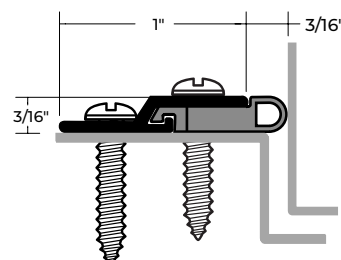


**120NA**  
**120NDKB**

Patent Pending




**127NA**  
**127NDKB**

Patent Pending

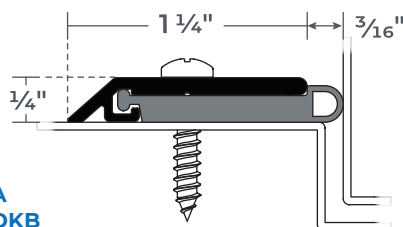


**130NA**  
**130NDKB**

Patent Pending

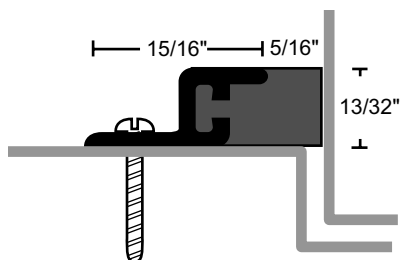

**122NA**  
**122NDKB**  
**133NA**  
**133NDKB**  
**165NA**  
**165NDKB**

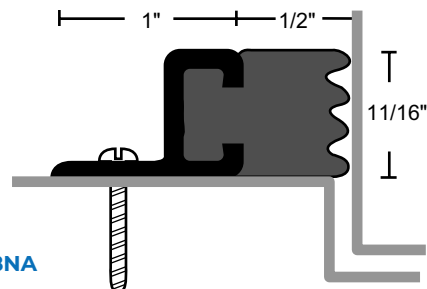

**108NA**