

NEOPRENE SPONGE SEALS

All Products on This Page:



- Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell Advanced Elastomeric Foam
- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment
- Patent Pending Microcellular EPDM


108NA

Anodized Aluminum
Neoprene Sponge
Seal




PRODUCT#	
SUFFIX	FINISH
A	Anodized Aluminum
DKB	Dark Bronze / Black Anodized

Neoprene is Black




110NA
110NDKB

Patent Pending




120NA
120NDKB

Patent Pending




127NA
127NDKB

Patent Pending

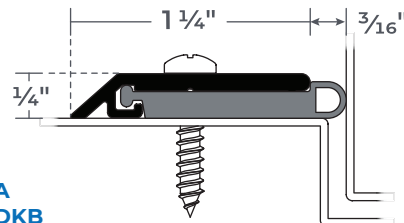


130NA
130NDKB

Patent Pending

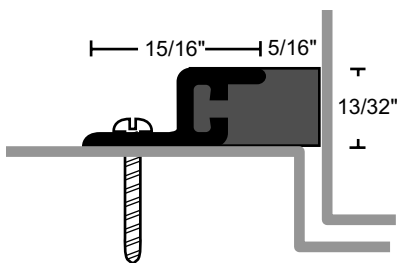

122NA
122NDKB
133NA
133NDKB
165NA
165NDKB

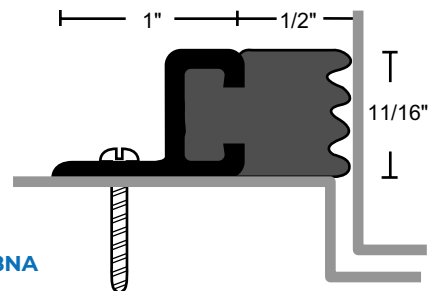

108NA