



131N

Neoprene Closed Cell Sponge Seal

PRODUCT CUT SHEET

Material


Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer Blend: PVC, Nitrile Rubber (NBR), and
Chloroprene Closed Cell Advanced Elastomeric Foam
Neoprene is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment

Finishes

131NA Anodized Aluminum
131NB Gold
131NDKB Dark Bronze

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

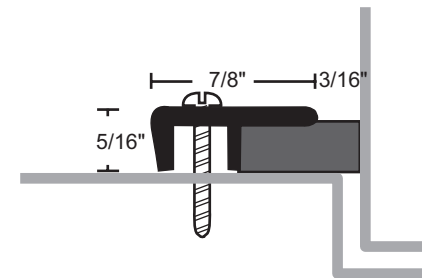

STC 44

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

NGP-GKT-131N-PCS-0323-A

ngp.com
1-800-NGP-RUSH