



# 133N

## Neoprene Closed Cell Sponge Seal

### PRODUCT CUT SHEET

#### Material



Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer Blend: PVC, Nitrile Rubber (NBR), and  
Chloroprene Closed Cell Advanced Elastomeric Foam  
Neoprene is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment

#### Finishes

133NA Anodized Aluminum  
133NB Gold  
133NDKB Dark Bronze

|               |
|---------------|
| PROJECT:      |
| SUBMITTED BY: |
| DATE:         |
| NOTES:        |

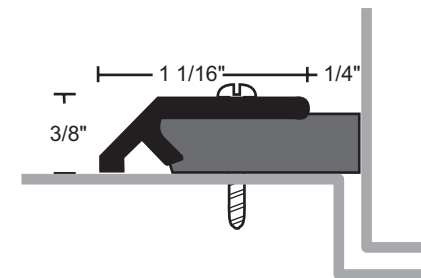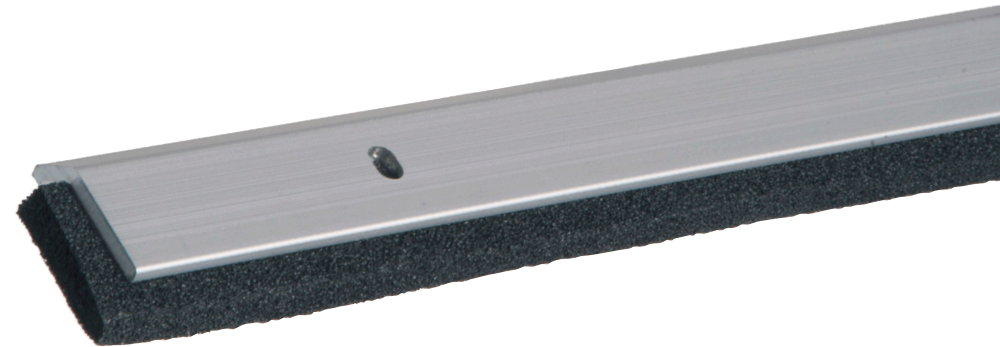

STC 39

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

NGP-GKT-133N-PCS-0323-A

**ngp.com**  
1-800-NGP-RUSH