

SILICONE SEALS

All Silicone Seals This Section:



- Synthetic Rubber Polymer
- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 300°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment






137SA

Anodized Aluminum
Silicone Dense Bulb
Perimeter Seal




PRODUCT# SUFFIX	FINISH
A	Anodized Aluminum
DKB	Dark Bronze / Black Anodized
None	Mill Aluminum

Dense Silicone is Black

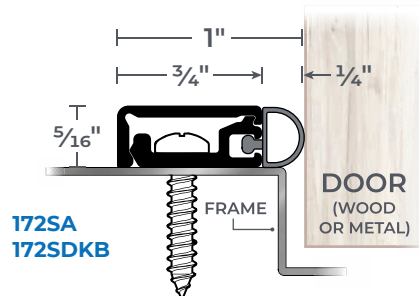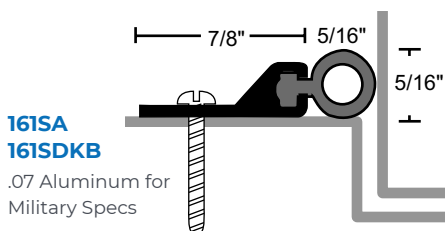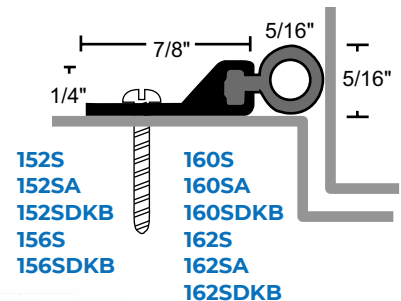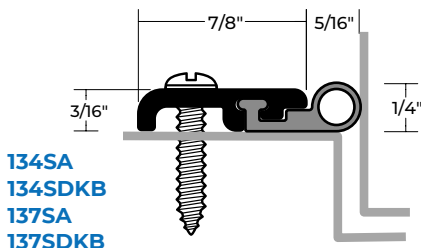

FOAM SEALS

- Seamless Compression Seals Are Nearly 100% Closed Cell to Prevent Water From Penetrating Foam Cell Structure
- Extruded Skin Provides a Unique UV Resistant Barrier With Design Features that Enhance the Weather Strip's Sealing Performance
- Compression: Recommended = 25% Minimum = 10% Maximum = 50%
- Achieves AAMA 702 Class "A" Extra High Performance Certification



PRODUCT#	INSERT	FINISH
384B	Brown	Mill
384BA	Brown	Anodized
384BDKB	Brown	D. Bronze