



160U

Polyurethane Seal

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Thermo-Plastic Vulcanizate (TPV)
Polyurethane is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -76°F to 275°F
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment

Options


FATT - Fast Attach Tape

Finishes

160U Mill Aluminum
160UA Anodized Aluminum
160UB Black Anodized
160UDKB Dark Bronze



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

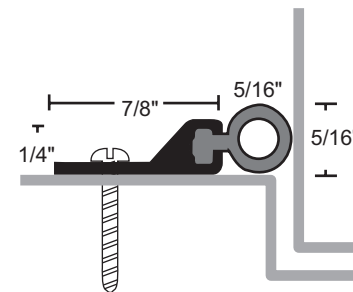

NGP-GKT-160U-PCS-0626-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH