



# 172N

## Neoprene Concealed Fastener Perimeter Seal

### PRODUCT CUT SHEET

#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix  
Neoprene is Black


- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Snap-On Cover Conceals Screw Heads for Clean Appearance
- #6 X 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment

#### Finishes


172NA Anodized Aluminum  
172NB Black Anodized  
172NDKB Dark Bronze

#### Options

FATT - Fast Attach Tape

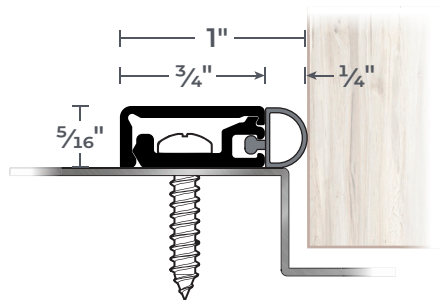

|               |
|---------------|
| PROJECT:      |
| SUBMITTED BY: |
| DATE:         |
| NOTES:        |

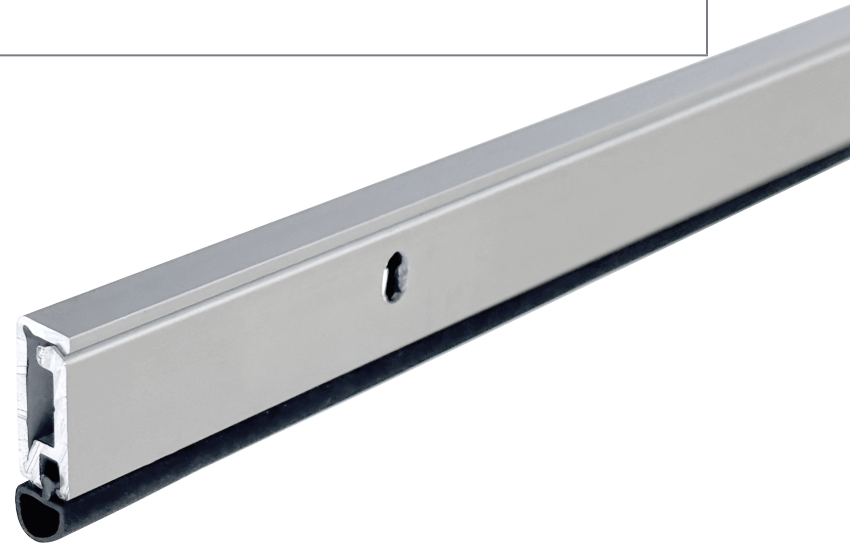

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874

**Email:** [info@ngp.com](mailto:info@ngp.com)

**Quotes:** [quotes@ngp.com](mailto:quotes@ngp.com)

**Orders:** [orders@ngp.com](mailto:orders@ngp.com)

NGP-GKT-172N-PCS-0626-A

**ngp.com**  
1-800-NGP-RUSH