



220S

Silicone Surface Automatic Door Bottom

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T6 Temper
Synthetic Rubber Polymer
Silicone Is Black


- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 300°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1 ½"
- Minimum Length 11 ½", Maximum Length 60"
- ¾" Max Drop
- Steel End Caps Furnished Standard – Black Finish
- All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

Finishes

220SA Anodized Aluminum
220SB Black Anodized
220SDKB Dark Bronze

Options

Lead Insert Available for Radiation Shield –
Specify 'Lead Lined'

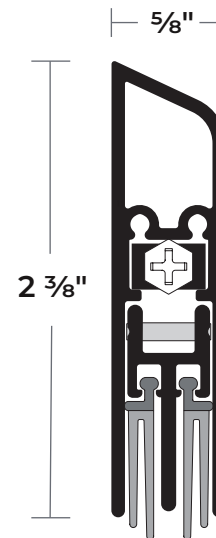

Left-Hand Unit Shown

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH

NGP-GKT-220S-PCS-0626-A