

AUTOMATIC DOOR BOTTOMS

SURFACE

All Products on This Page:



- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- ADB's from 12" to 18" Can be Cut Down $\frac{1}{2}$ ". ADB's 20" and Over Can be Cut Down up to $1\frac{1}{2}$ "
- Minimum Length $11\frac{1}{2}$ ", Maximum Length 60"
- $\frac{3}{4}$ " Max Drop
- Steel End Caps Furnished Standard – Black Finish
- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- Lead Insert Available for Radiation Shield – Specify 'Lead Lined'
- All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

220SA

Anodized Aluminum Automatic Door Bottom with Silicone Seal




PRODUCT#	SUFFIX	FINISH
	A	Anodized Aluminum
	DKB	Dark Bronze / Black Anodized
	None	Mill Aluminum

SURFACE

220NA	Black Neoprene
220NDKB	Black Neoprene

220SA	Black Silicone
220SDKB	Black Silicone


220WHA	Black Nylon Brush
220WHDKB	Black Nylon Brush

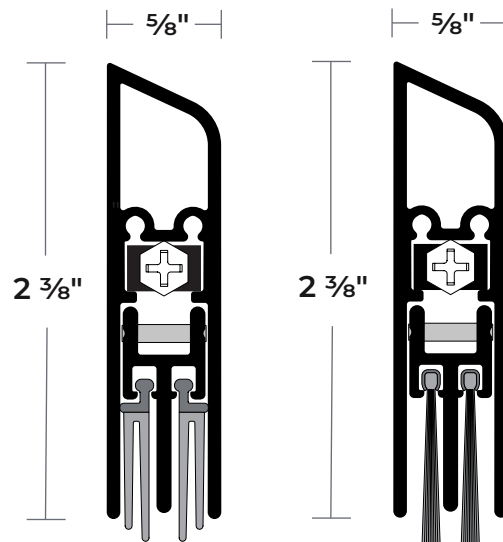

222NA	Black Neoprene
222NDKB	Black Neoprene

222SA	Black Silicone
222SDKB	Black Silicone

222WHA	Black Nylon Brush
222WHDKB	Black Nylon Brush

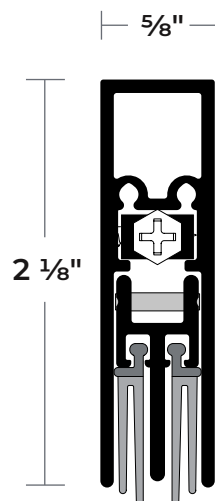

Drop Bar with Nylon Brush - Suffix "WH"



STAINLESS STEEL

- ADB's from 12" to 18" can be cut down $\frac{1}{2}$ ". ADB's 20" and over can be cut down up to $1\frac{1}{2}$ "
- Minimum Length $11\frac{1}{2}$ ", Maximum Length 60"
- $\frac{3}{4}$ " Max Drop
- Stainless Steel End Caps Furnished Standard – #4 Brushed Finish

229NSS Black Neoprene

229SSS Black Silicone

229WHSS Black Nylon Brush

