



# 222S

## Silicone Surface Automatic Door Bottom

### PRODUCT CUT SHEET

#### Material

Aluminum Alloy 6063, T6 Temper  
Synthetic Rubber Polymer  
Silicone Is Black

- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 300°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1 ½"
- Minimum Length 11 ½", Maximum Length 60"
- ¾" Max Drop
- Steel End Caps Furnished Standard – Black Finish
- All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

#### Finishes



222SA Anodized Aluminum  
222SB Black Anodized  
222SDKB Dark Bronze

#### Options

Lead Insert Available for Radiation Shield –  
Specify 'Lead Lined'



|               |
|---------------|
| PROJECT:      |
| SUBMITTED BY: |
| DATE:         |
| NOTES:        |

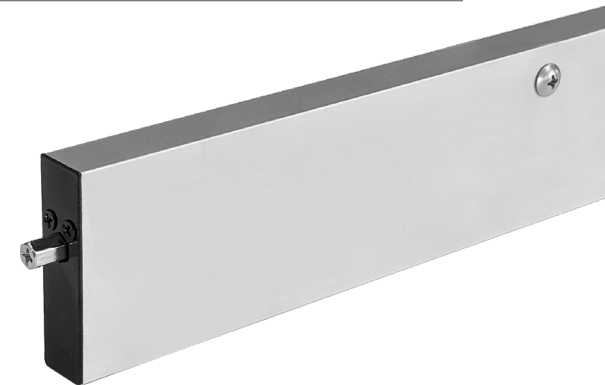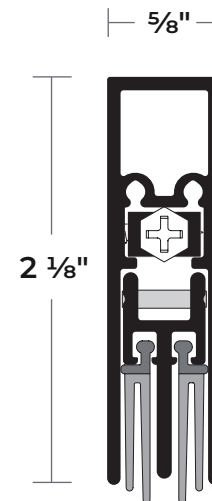

NGP-GKT-222S-PCS-0626-A

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874

**Email:** info@ngp.com

**Quotes:** quotes@ngp.com

**Orders:** orders@ngp.com

**ngp.com**  
1-800-NGP-RUSH