



320SA

Silicone Automatic Door Bottom for Hollow Metal Doors

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T6 Temper
Synthetic Rubber Polymer
Silicone Is Black

- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility And Memory
- Under 1 lb. Closing Force on a 36" Door
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 300°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Fits in 1 5/8" x 3/4" Channel. A "Furring Strip" May Be Used to Lower Automatic Door Bottom When a Deeper Channel is Used
- Furnished 1/2" Shorter Than Ordered to Fit Within Net Door Size.
(i.e. 36" is Furnished 35 1/2") Length May be Field Cut up to 1 1/2"
- ADB's from 12" to 18" Can be Cut Down 1/2". ADB's 20" and Over Can be Cut Down up to 1 1/2"
- Fire Ratings Apply to Metal Doors Only
- #6 x 1/2" Tek Screws Furnished
- End Caps Not Available
- Available 12" to 60" in Length
- 5/8" Max Drop
- Non-Handed

Finish

Clear Anodized Aluminum

Options

Lead Insert Available for Radiation Shield –
Specify 'Lead Lined'





PROJECT:

SUBMITTED BY:

DATE:

NOTES:

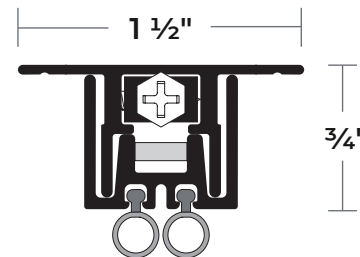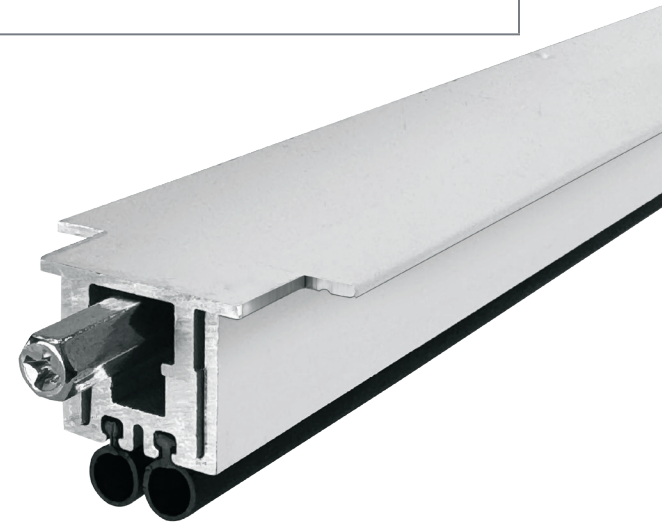

NGP-GKT-320SA-PCS-0426-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH