



320VA

Vinyl Automatic Door Bottom for Hollow Metal Doors

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T6 Temper
Thermo-Plastic Vulcanizate (TPV)
Vinyl is Black

- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Economical
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -40°F to 250°F
- ▶ Fits in 1 5/8" x 3/4" Channel. A "Furring Strip" May Be Used to Lower Automatic Door Bottom When a Deeper Channel is Used
- ▶ Furnished 1/2" Shorter Than Ordered to Fit Within Net Door Size. (i.e. 36" is Furnished 35 1/2") Length May Be Field Cut up to 1 1/2"
- ▶ ADB's from 12" to 18" Can be Cut Down 1/2". ADB's 20" and Over Can be Cut Down up to 1 1/2"
- ▶ Fire Ratings Apply to Metal Doors Only
- ▶ #6 x 1/2" Tek Screws Furnished
- ▶ End Caps Not Available
- ▶ Available 12" to 60" in Length
- ▶ 5/8" Max Drop
- ▶ Non-Handed

Finish



Clear Anodized Aluminum

Options

Lead Insert Available for Radiation Shield – Specify 'Lead Lined'



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

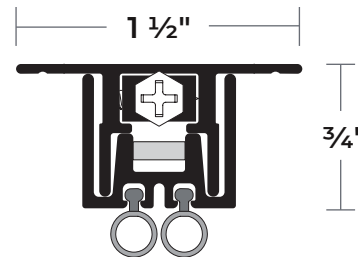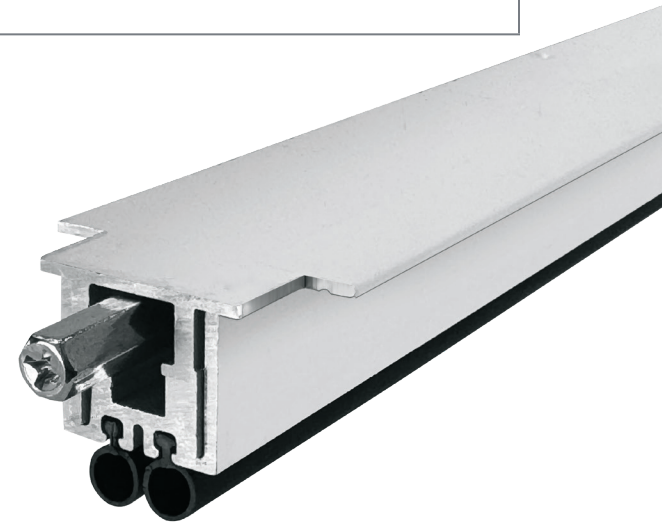

NGP-GKT-320VA-PCS-0426-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH