



520N

Neoprene Heavy Duty Surface Automatic Door Bottom

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T6 Temper
Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
Neoprene is Black


- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1 ½"
- ▶ Minimum Length 11 ½", Maximum Length 60"
- ▶ ¾" Max Drop
- ▶ Steel End Caps Furnished Standard – Black Finish
- ▶ All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

Finishes

520NA Anodized Aluminum
520NB Black Anodized
520NDKB Dark Bronze

Options

Lead Insert Available for Radiation Shield –
Specify 'Lead Lined'

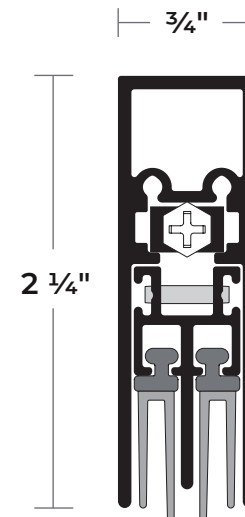

NGP-GKT-520N-PCS-0626-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH