



9200

Gap Solution for Excessive Fire Door & Frame Clearances — up to 60 Minutes

PRODUCT CUT SHEET

Self-Adhesive Intumescent


- ▶ UL Certified Solution for 20- and 45-Minute Fire Doors with Excessive Clearance Between Door and Frame Over $\frac{1}{8}$ ", up to $\frac{3}{8}$ "
- ▶ UL Certified Solution for 60-Minute Fire Doors with Excessive Clearance Between Door and Frame Over $\frac{1}{8}$ ", up to $\frac{5}{16}$ "
- ▶ May be Installed on the Door or on the Frame as Illustrated
- ▶ For Use on up to 60-Minute Rated UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Multiple Strike Shims 9275 or 9225 May Also be Required for Proper Latchbolt Engagement
- ▶ NGP Intumescent Materials are Formulated to Expand at 275°F up to 20 Times Their Original Thickness; Completely Sealing the Gap Around and Between Doors During a Fire
- ▶ Modified Acrylic Pressure-Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long-Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol, and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long-Term Exposure -30°F up to 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ▶ Sold by the Foot: 3' Minimum to 410' Reel

FINISH:

9200GR Gray
9200C Charcoal



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

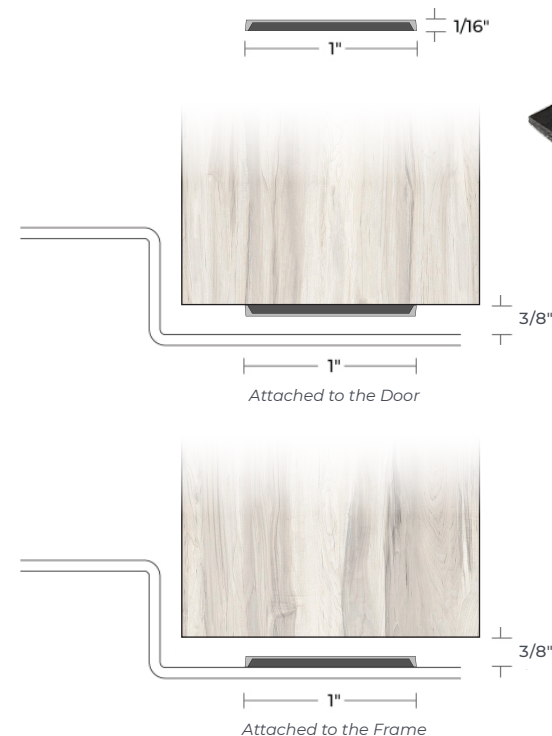

Pictured:
9200C
(Charcoal)

NGP-GAP-9200-PCS-0526-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH