

# 9220

## EXCESSIVE CLEARANCE DOOR BOTTOM



UL CERTIFIED FOR USE IN  
THE US AND CANADA

**Gap Solution for Excessive Fire Door  
Bottom Clearance up to 20 Minutes  
NGP-Edge® Intumescent Door Sweep.  
UL Certified for Door Bottom  
Gaps — Measuring up to 1½".**

### PRODUCT INFORMATION



- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps
- ▶ Vinyl (V) is Thermo-Plastic Vulcanizate (TPV),  
Brush (WH) is Synthetic Polymer: Polyamide
- ▶ Moisture-Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame-Resistant
- ▶ Temperature Range -40°F to 250°F
- ▶ Up to 20-Minute Rated — for Use on  
UL10B and UL10C Wood or  
Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths  
(Can Be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x ¾" Stainless Steel SMS Furnished



Pictured:  
**9220V**



POSITIVE PRESSURE TESTED  
MISCELLANEOUS FIRE DOOR  
ACCESSORY

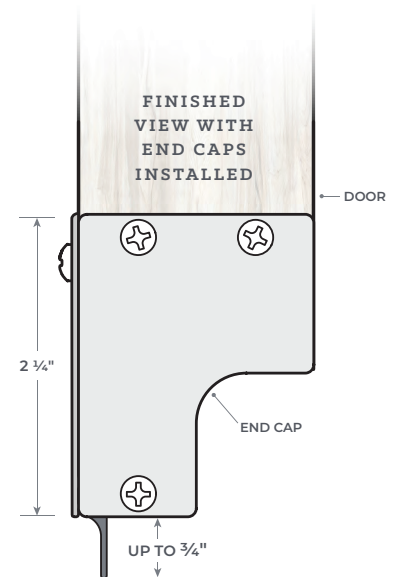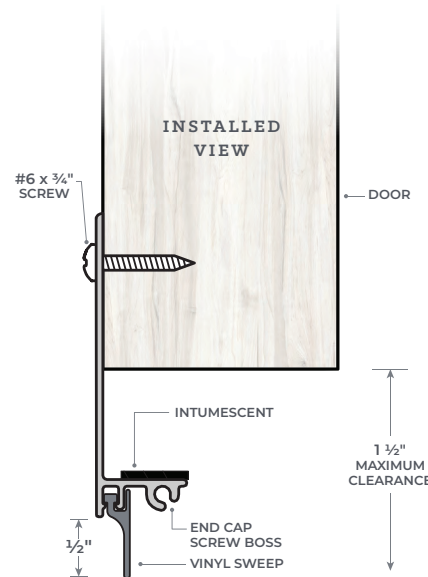

|           |                   |             |
|-----------|-------------------|-------------|
| 9220VA    | ANODIZED ALUMINUM | BLACK VINYL |
| 9220VDKB  | DARK BRONZE/BLACK | BLACK VINYL |
| 9220WHA   | ANODIZED ALUMINUM | GRAY BRUSH  |
| 9220WHDKB | DARK BRONZE/BLACK | BLACK BRUSH |