


9590

FIRE DOOR BOTTOM GAP SOLUTION



UL CERTIFIED FOR USE IN
THE US AND CANADA

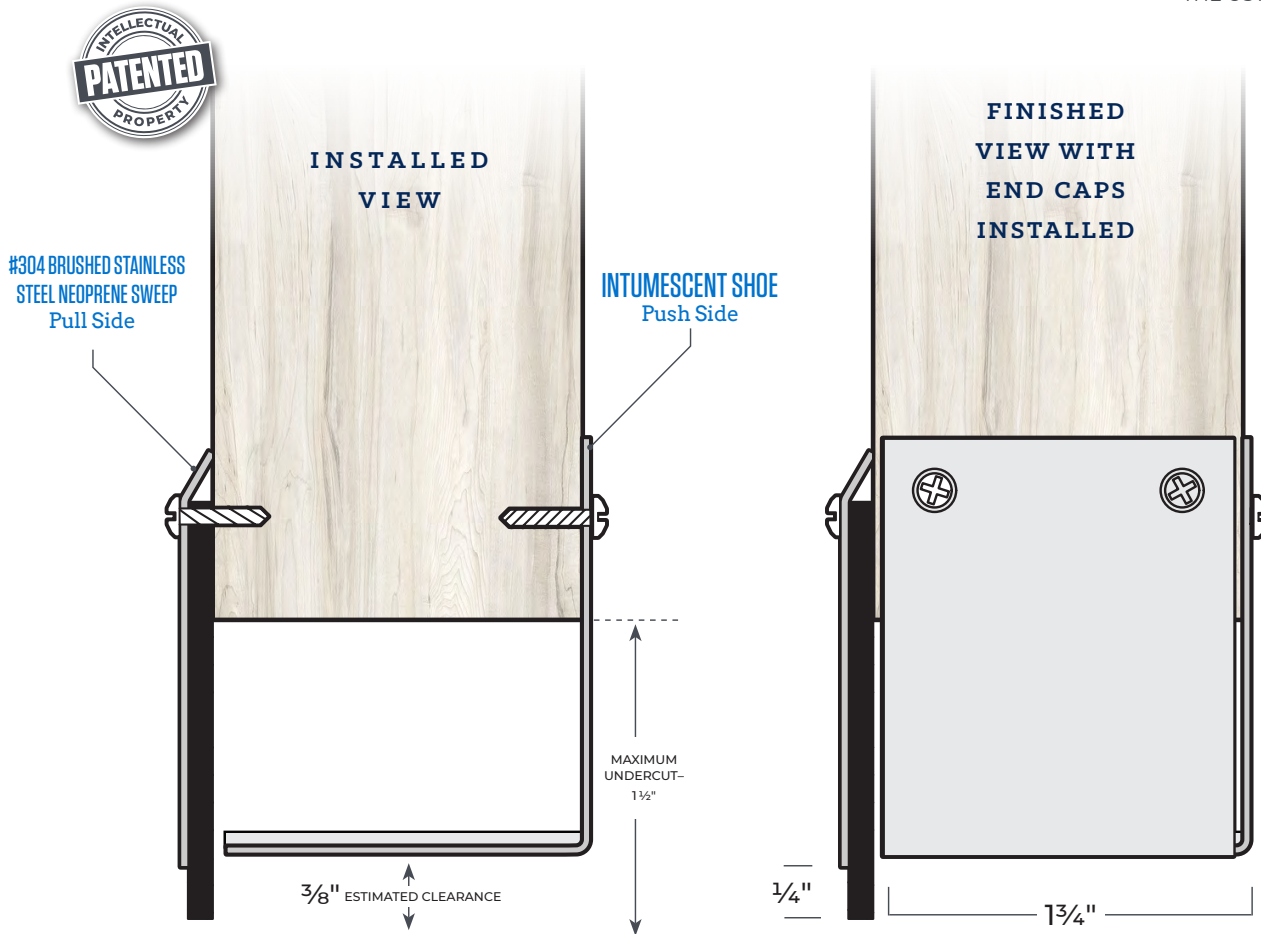

PRODUCT INFORMATION

UL Certified for Door Bottom Gaps — Measuring up to 1 1/2"

- Restricts the Passage of Smoke
- 180-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Available in 36" and 48" Lengths
- Non-Handed
- Patented: US Patent US 11,873,679 B2

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
 - + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
 - + #304 Brushed Stainless Steel End Caps
 - + #6 x 3/4" Stainless Steel SMS Furnished
- Brushed stainless steel
Neoprene is black*



POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY