



9590

Fire Door Bottom Gap Solution — Up To 180 Minutes

PRODUCT CUT SHEET

UL Certified for Door Bottom Gaps —
Measuring up to 1½"



UL CERTIFIED FOR USE IN
THE US AND CANADA


- 180-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Restricts the Passage of Smoke
- Available in 36" and 48" Lengths
- Non-Handed
- Patented: US Patent US 11,873,679 B2

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
- + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 X ¾" Stainless Steel SMS Furnished

FINISH:

Brushed Stainless Steel
Neoprene is Black

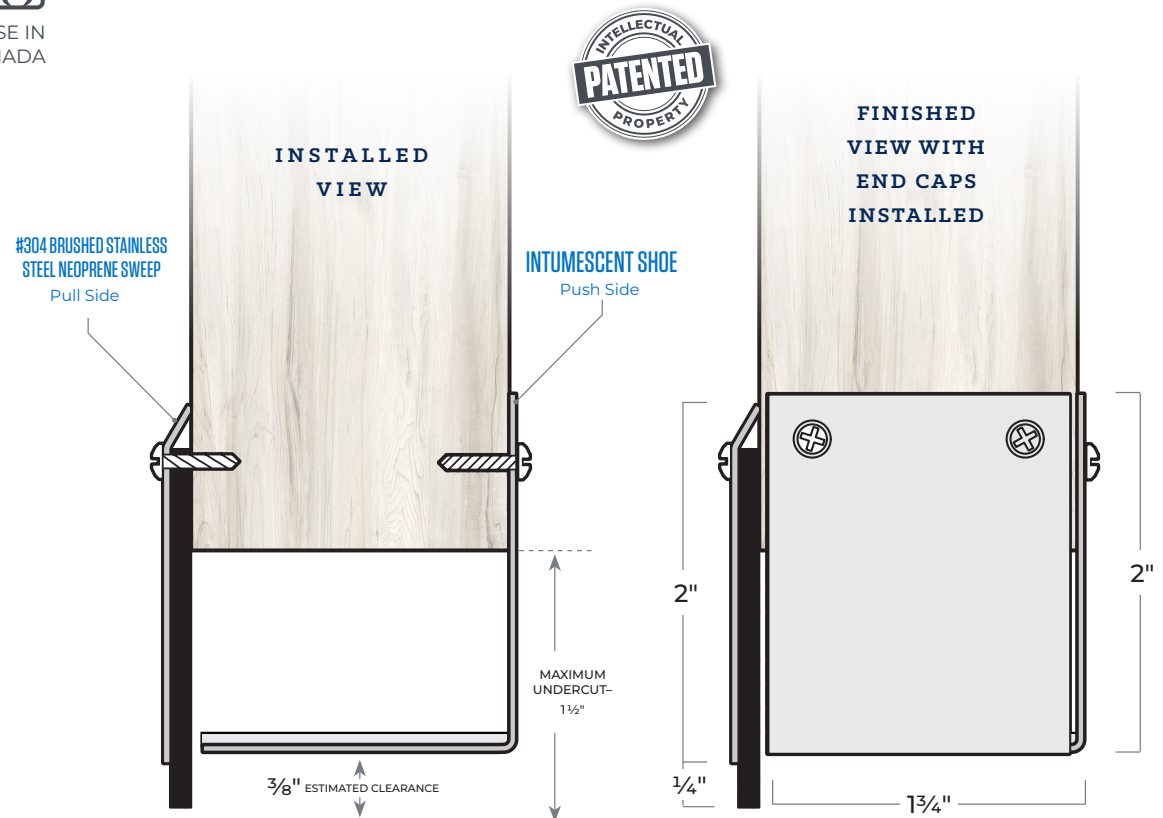

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



NGP-GAP-9590-PCS-0526-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH