


9595DKB

FIRE DOOR BOTTOM GAP SOLUTION



UL CERTIFIED FOR USE IN
THE US AND CANADA

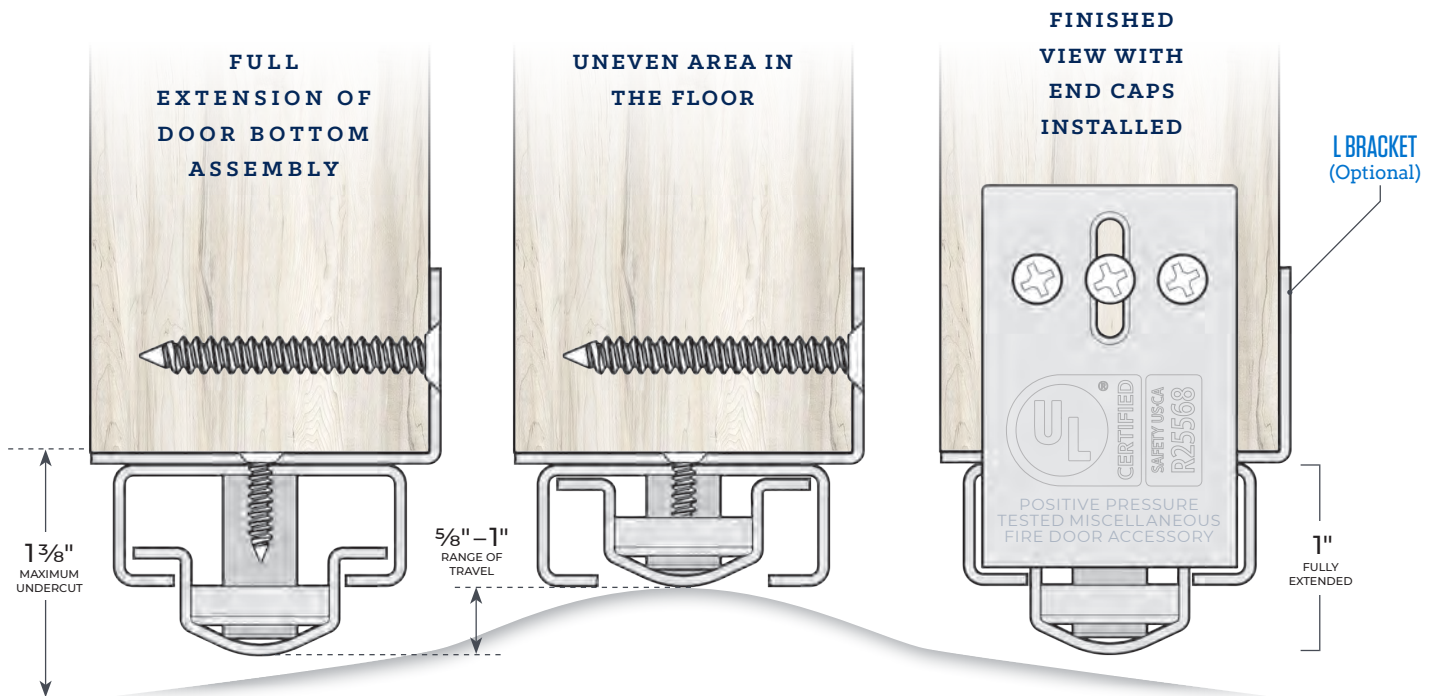

PRODUCT INFORMATION



UL Certified Solution for Fire Doors With Excessive Clearance Between the Bottom of the Door and Finished Floor, up to 1 3/8".

- Application Certified on both Hollow Metal and Wood Fire-Rated Doors, up to 90 Minutes
- Non-Handed
- L-Bracket Allows Installation while Door Remains on Hinges
- Field Trim to Fit: up to 1 1/2" per side, 3" Total
- Designed to Travel Over Uneven Floors, with a Range of 3/8"
- May be Fastened to the Underside of the Door's Bottom Rail to Minimize Visibility.
- End Caps Set Height Position and Provide a Finished Look
- Sizes: 36", 42" and 48"
- Patented: US Patent US 11,761,262 B2

PRODUCT CONSISTS OF:

- + L-Bracket, 16-Gauge Steel, Embossed with UL Mark
- + Door Bottom Assembly, 18-Gauge Steel
- + End Caps, 18-Gauge Steel, Embossed With UL Mark
- + Hardware Pack
 - #10 x 1 1/2" PHPH SS SMS (DKB)
 - #8-32 x 1 3/4" PHP SS Thru-Bolt (DKB)
 - #6 x 3/8" SS TEK
 - #10 x 2" PHPH SS SMS
 - #6 x 3/4" FHPH SS SMS (DKB)

Powder Coated: Matte Black



POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY