



9595DKB

Fire Door Bottom Gap Solution

PRODUCT CUT SHEET

UL Certified Solution for Fire Doors With Excessive Clearance Between the Bottom of the Door and Finished Floor, up to 1 3/8".



UL CERTIFIED FOR USE IN
THE US AND CANADA




- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90 Minutes
- Non-Handed
- L-Bracket Allows Installation while Door Remains on Hinges
- Field Trim to Fit: up to 1 1/2" per Side, 3" Total
- Designed to Travel Over Uneven Floors, with a Range of 3/8"
- Visibility of Hardware is Minimized by Using L-Bracket on Pull-Side of the Door
- May be Fastened to the Underside of the Door's Bottom Rail to Minimize Visibility
- End Caps Set Height Position and Provide a Finished Look
- Sizes: 36", 42" and 48"
- Patented: US Patent US 11,761,262 B2

PRODUCT CONSISTS OF:

- + L-Bracket, 16-Gauge Steel, Embossed with UL Mark
- + Door Bottom Assembly, 18-Gauge Steel
- + End Caps, 18-Gauge Steel, Embossed with UL Mark
- + Hardware Pack:
 - #10 x 1 1/2" PHPH SS SMS (DKB)
 - #8-32 x 1 3/4" PHPH SS Thru-Bolt (DKB)
 - #6 x 3/8" SS TEK
 - #10 x 2" PHPH SS SMS
 - #6 x 3/4" FHPH SS SMS (DKB)

FINISH:

Powder Coated: Matte Black

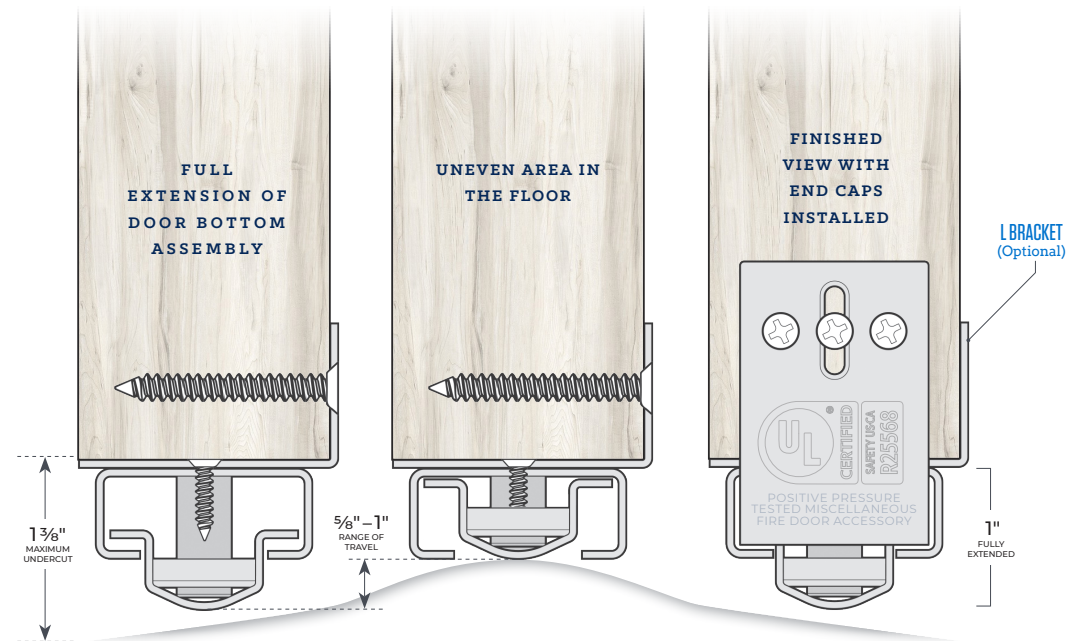

NGP-GAP-9595DKB-PCS-0625-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH