


9990

FIRE DOOR TOP GAP SOLUTION



UL CERTIFIED FOR USE IN
THE US AND CANADA

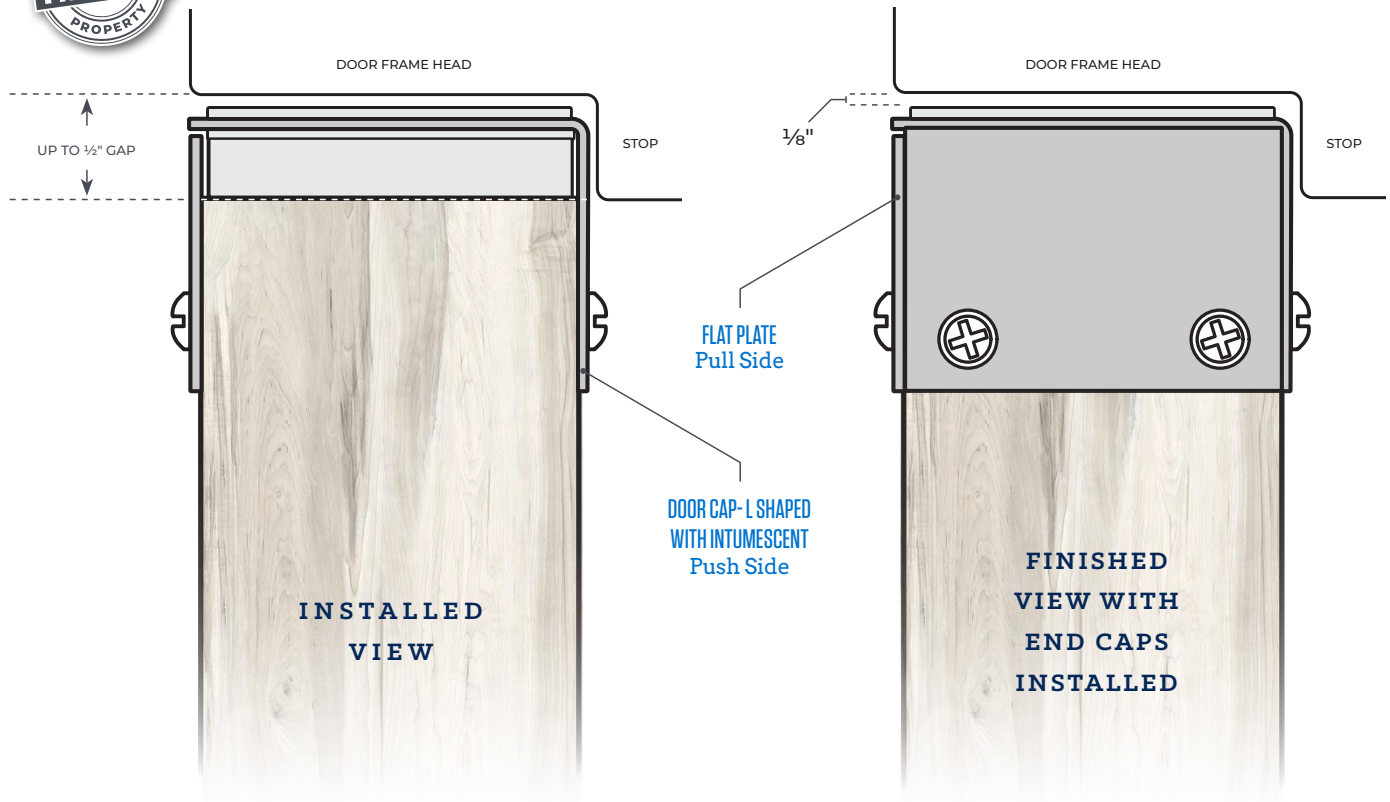

PRODUCT INFORMATION

UL Certified for Door Top Gaps — Measuring up to 1/2"

- ▶ 180-Minute Rated— for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Recommended for Doors with Parallel Arm Closers
- ▶ Available in 36" and 48" Lengths
- ▶ Brushed Stainless Steel
- ▶ Non-Handed
- ▶ Patented: US Patent US 11,261,653 B2

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Flat Plate - Pull Side
- + #304 Brushed Stainless Steel Intumescent Cap—Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 × 3/4" Stainless Steel SMS Furnished



POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY