



GAP90

Gap Solution for Excessive Fire Door & Frame Clearances— 180 Minute PRODUCT CUT SHEET

UL Certified for Head/Jamb Gaps — Measuring Over 1/8", and up to 9/16".

UL CERTIFIED FOR USE IN
THE US AND CANADA



- UL Certified Solution for Hollow Metal Fire Doors Rated up to 180 Minutes, and Wood Fire Doors Rated up to 90 Minutes with Excessive Clearance Between Door and Frame Over 1/8", up to 9/16"
- Restricts the Passage of Smoke
- Non-Handed
- Available in 36", 48", 84" and 96" Lengths
- Multiple Strike Shims (9275 or 9225) may also be Required for Proper Latchbolt Engagement
- Doors with Parallel Arm Closers — Use 9990 Fire Door Top Gap Solution for Excessive Gaps up to 1/2"
- Patented: US Patent 9,273,510 B2

GAP90


Requires Installation of ALL Components:
9945, 9400GR, 5050C

GAP90DKB

Requires Installation of ALL Components:
9945, 9400C, 5050C

9945

Steel Stop Extender



- 16-Gauge, Gray Primer Finish
- Furnished With #10 X 1" TEK SMS
- Patented: US Patent 9,273,510 B2
- Embossed with **UL Mark**

5050


Silicone Bulb Fire and Smoke Seal



9400

NGP-Edge® Intumescent Seal with PVC Cover

- Self-Adhesive



See Adhesive Specifications on Page G14

PROJECT:


SUBMITTED BY:

DATE:

NOTES:

INSTALLED VIEW

Alternate 5050
placement locations:

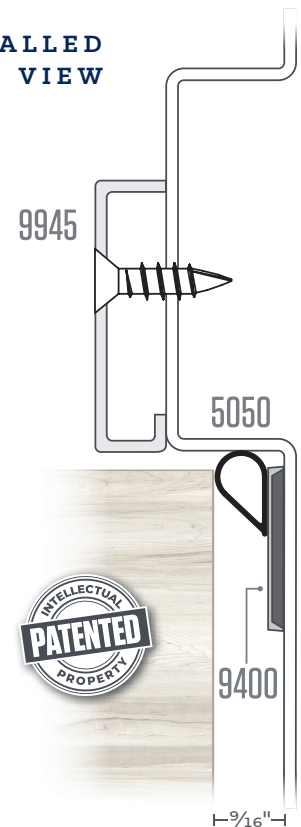

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH

NGP-GAP-GAP90-PCS-0526-A