

CONTINUOUS GEARED HINGE

HALF SURFACE

$\frac{3}{32}$ " DOOR INSET FOR $1\frac{3}{4}$ " TO $2\frac{1}{4}$ " DOORS

HD5400

Continuous geared aluminum hinges run the full height of the door, evenly distributing the weight of the door along the full height of the frame. Ideal for high-frequency and heavy-weight doors in new construction and retrofit applications.

- ▶ Aluminum alloy 6063-T6; Anodized after machining
- ▶ Specially designed involute intermeshing gears
- ▶ Proprietary Teflon infused self-lubricating wear resistant bearings
- ▶ No hinge reinforcement necessary except on extremely heavy, extremely high-frequency or extra-wide doors
- ▶ Lifetime of the door opening warranty
- ▶ Frame leaf: #12-24 TEK flat head MS
- ▶ Door leaf: #12-24 TEK pan head MS and $\frac{1}{4}$ "-20 thru-bolts
- ▶ Standard lengths: 83", 85", 95", 119"

Available Options

- ▶ #12 x $1\frac{1}{2}$ " Wood Screws
- ▶ Torx Security TEK & T.B. M.S.
- ▶ $1\frac{1}{2}$ " Torx Security Wood Screws
- ▶ Cut to Net Length - Specify Door Handing
- ▶ Anti-Ligature Hospital Tip - Specify "TIPIT® LG"
- ▶ Dutch Door Prep - Order Form Available at ngp.com
- ▶ Electronic Power Transfer Prep - Specify "EPT" Order Form Available at ngp.com

Finishes:


A - Anodized Aluminum
DKB - Dark Bronze/Black Anodized



Fire-rated 90-minute on hollow metal (except steel stiffened) or wood door leafs up to 4'0" x 7'2"



ANSI/BHMA Certified to A156.26 American National Standard for Continuous Hinges:
Grade 1 - 600 lb. Door

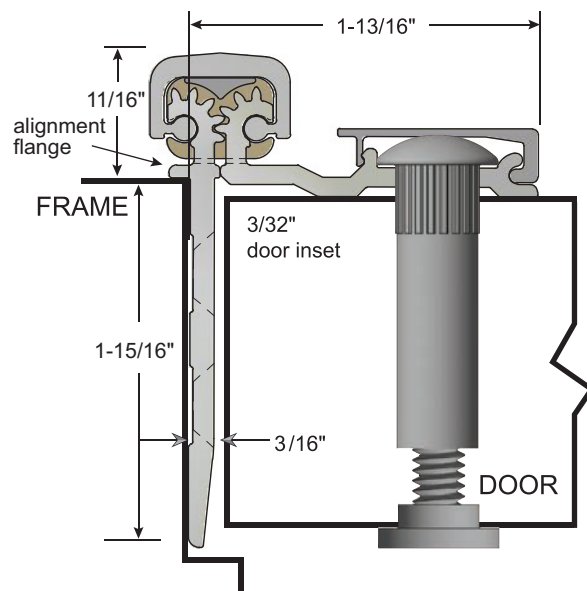

Frame leaf covers butt hinge preps
Concealed fastener cover on door leaf

