



L-FRA100-SP

Low Profile Lite Kit

PRODUCT CUT SHEET

For Variable Door and/or Glass Thickness


- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Minimum 3" Width or Height
Maximum 88" Width or Height
- #8 Phillips Head SMS
- Available in Uneven and Fractional Sizes
- Gray Primer (GPZ) Powder Coat Finish

Required Information

- Specify Glass Thickness on Order
- Specify Door Thickness on Order if Other Than 1 3/4"

Available Options

- Powder Coat Color Options - See Color Chart on ngp.com
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape
- Lead Lining - 1/16" Thick

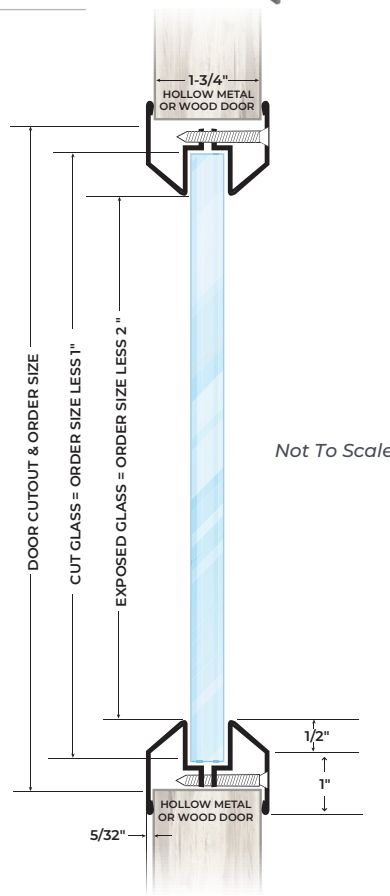

Not To Scale

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

- Details Shown are for 1 3/4" Door Thickness
- Only Configurations Shown are Available

	DOOR	GLASS	GL. TAPE
	1-3/4"	3/8"	GT-114
	1-3/4"	7/16"	GT-114
	1-3/4"	1/2"	GT-316
	1-3/4"	9/16"	GT-118
	1-3/4"	5/8"	GT-118
	1-3/8"	1/4"	GT-118
	1-3/4"	3/4"	GT-114
	1-3/4"	7/8"	GT-316
	1-3/4"	1"	GT-118
	1-3/8"	3/8"	GT-114
	1-3/8"	1/2"	GT-316

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NGP-LIT-L-FRA100-SP-PCS-0926-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH