





FOR 1 3/4" THICK DOORS AND 3/16", 1/4" OR 5/16" GLASS

- 20 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Countersunk Mounting Screw-Holes
- #8 X 1 3/4" Phillips Head SMS
- Available in Uneven and Fractional Sizes
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options - See Page L3
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape - See Glass Section
- Lead Lining - 1/16" Thick

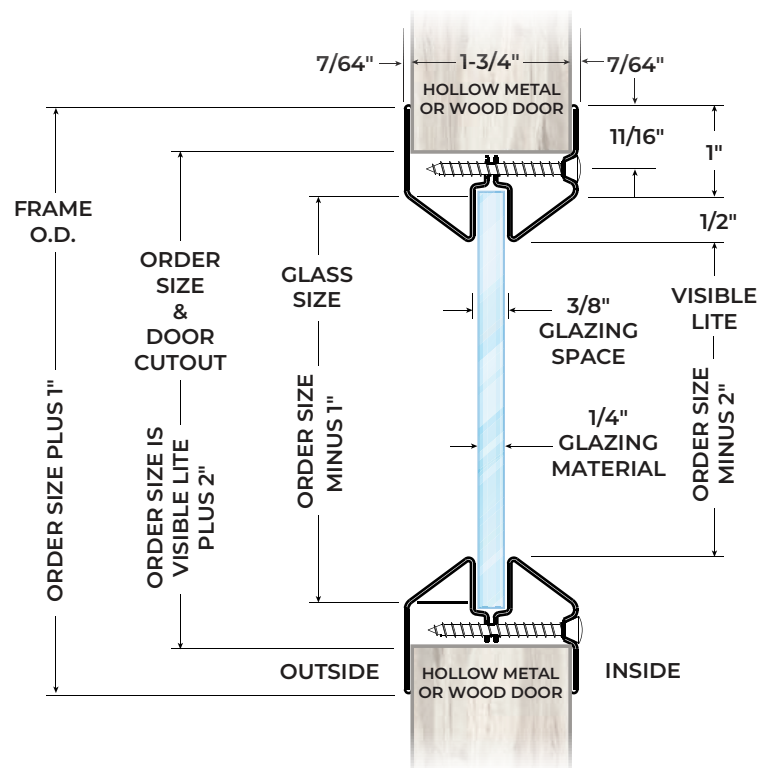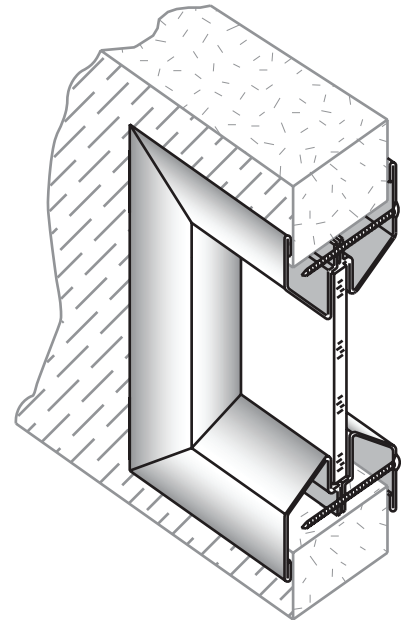

Not To Scale

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".