


Traditional

A tall, narrow, light-colored cabinet with a glass door and a solid door. The cabinet has a minimalist design with a thin black frame. The top half has a glass door, and the bottom half has a solid door. The interior is visible through the glass door, showing a shelf and a small compartment. The cabinet is shown in a three-quarter view, highlighting its slim profile.



MR 4.1 (1) EQ 4.1 (1)
MR 4.2 (1) EQ 4.2 (1)
MR 6 (1) EQ 4.4 (1)

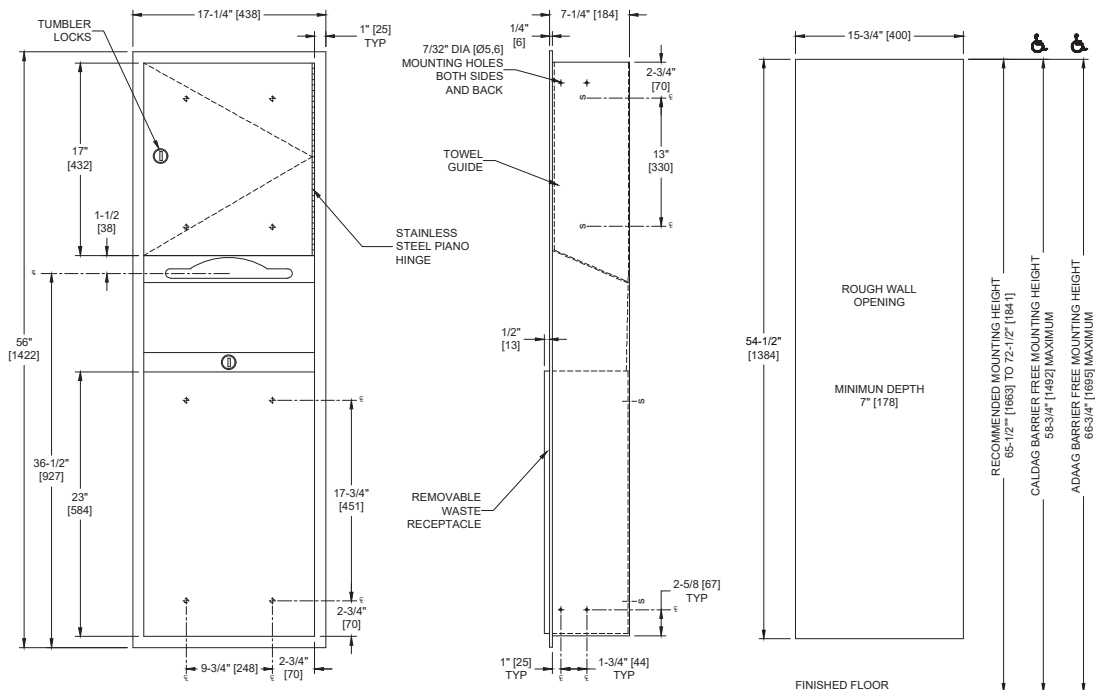

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

Dispenses 600 C-fold, 800 multi-fold or 1100 single-fold paper towels. 12 gal. (46L) stainless steel waste receptacle. Adjustable guide provided to allow dispensing of multi-fold or C-fold paper towels. Paper towels are manually withdrawn through dispensing slot. An adjustable towel adapter ensures that towels feed properly until depleted. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Locking compartment and receptacle retainer prevents unauthorized access or removal.

- Double-pan construction door has "no-Flex" fiberboard filler for added rigidity and strength
- Door is attached to the cabinet with a 3/16" diameter [Ø5] Heavy-duty, Multi-Staked Stainless Steel Piano Hinge
- 22 gauge Type 304 Stainless Steel - Satin Finish
- Recessed
- 600 C-Fold or 800 Multi-Fold

OPERATION & MAINTENANCE

Paper towels are manually withdrawn through dispensing slot. An adjustable towel adapter ensures that towels feed properly until depleted. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking compartment and receptacle retainer prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-1/4" [438] W x 56" [1422] H x 7-3/4" [197] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	600 C-Fold or 800 Multi-Fold / 12 Gal. (46L) Waste Capacity

INSTALLATION

Mount unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. For compliance with 2010 ADA Accessibility Standards mount unit with centerline of towel outlet 48" [1219] maximum Above Finish Floor (AFF).

Rough Wall Opening (RWO) required is 15-3/4" [400] W x 54-1/2" [1384] H x 7-1/4" [184] D minimum

WARRANTY

One (1) Year from date of Invoice