

Folding Shower Seat, Padded – L Shaped – Right Hand, ADA

Shower/Tub Accessories


MasterFormat Section 10 28 13



Scan for
Information



SUSTAINABILITY/LEED

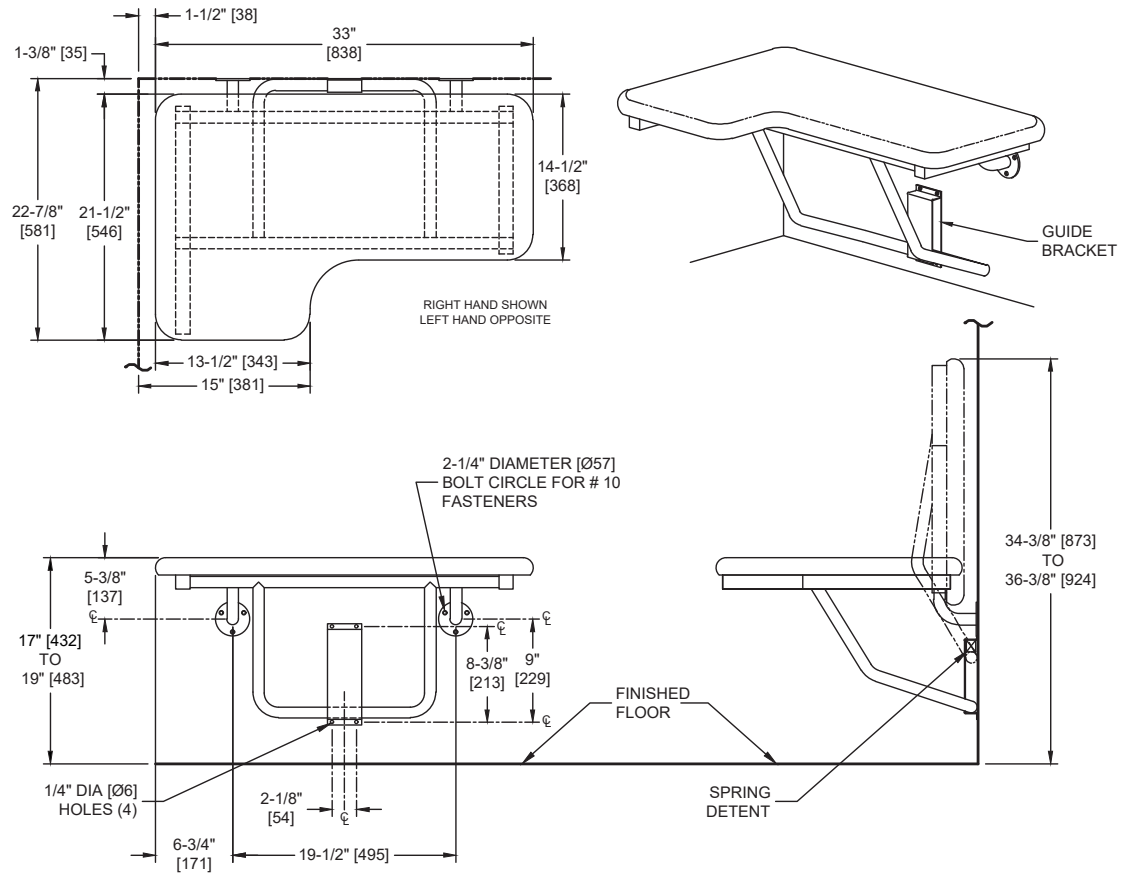

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Meets 2010 ADA Accessibility Standards and the needs of the physically disabled and elderly. Seat is 1/2" [13] thick. Right hand seat with cushion covered in off-white Naugahyde®. Frame, support legs, flanges, and bracket are type 304 satin finish stainless steel.

KEY FEATURES & SPECIFICATIONS

- L Shaped - Right Handed - ADA Compliant
- Seat folds up when not in use - Surface Mounted - Requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival.
- Seat made w/Off-White Naugahide Padding, on a marine grade wood.
- Support loads up to 500 lbs maximum if installed properly
- Body made of Type 304 Stainless Steel
- 33" [838] Wide

OPERATION & MAINTENANCE

Fold-up Shower Seat requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival. Guide bracket with spring detent prevents seat from dropping and provides positive support in usage position as well as spring locked storage position.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	Fold Down: 33" [838] W x 17" [432] to 19" [483] H x 22-7/8" [581] D
Construction	Seat made w/Off-White Naugahide Padding, on a marine grade wood. Body made of Type 304 Stainless Steel
Mounting	Surface Mounted
Materials	<u>Tubes:</u> 18 gauge (.048" [1,2] thick) type 304 stainless steel, 1" Dia. [Ø25] and 1-1/4" [32] square. Unitized all welded construction. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. <u>Flanges:</u> 3/16" [4,8] type 304 stainless steel. Exposed surfaces have satin finish. Edges and corners are radiused and burr free. <u>Brackets:</u> 16 gauge (.06" [1,52] thick) type 304 stainless steel. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. <u>Seat:</u> Closed cell medium density foam cushion covered with off-white Naugahyde® on a 1/2" [13] thick base of marine grade plywood. Seat cover top edge seam is sewn internally, laid flat and restitched for strength and smooth comfort. Bottom edge seam is tuck-and-roll construction. All seams are sewn using mildew-resistant Nylon® heavyweight thread. Bottom is fully covered and edges are tucked and concealed stainless steel stapled to base. Concealed mounting is from bottom with stainless steel screws into stainless steel inserts. <u>Spring:</u>Stainless steel wire type 304 OD 27/32" [Ø21,6] coils x 2-1/4" [57,2] body length x .085" Dia. [Ø2,2] wire.

INSTALLATION

This unit is surface mounted. Installer/contractor must provide concealed anchor plate or blocking as specified in construction documents or as required by local building codes prior to wall finishing. Fasten unit flanges and guide bracket to concealed anchor or blocking plate with appropriate hardware. Note that concealed mounting plates or anchors and hardware are not supplied with this product and must be specified separately. Ensure that mounting configuration complies with local building codes.

CAPACITY

Support loads up to 500 lbs maximum if installed properly

WARRANTY

One (1) Year from date of Invoice