



FP180-225

Frame Patch Kit

PRODUCT CUT SHEET

Application Certified for Steel Fire Doors and Frames Rated up to 180 Minutes



UL CERTIFIED FOR USE IN
THE US AND CANADA


- Maximum Area of Cutout Concealed by Frame Patch is 2 ½ Sq. In.
- Allowed to be Used on Steel Frames up to 14 Ga. Thickness
- Allowed to be Used on Steel Doors up to 16 Ga. Thickness
- Must Maintain Adequate Coverage on All Sides of Cutout
- Adhesive Tape May be Used in Addition to Mechanical Fastener

PRODUCT CONSISTS OF:

- + Metal Plate, 24 Ga. Steel, Embossed with UL Mark
 - + Hardware Pack: 10-24 x 1.5 F8-P-SS-ST Washer
Spring Lock Anchor Toggle
¾" Magnets ¼" x ⅜" OD
-
- Size 1 ⅜" x 2 ⅝"
 - Box of 5 ea. Complete Patches

FINISH:

Primer Gray, Powder Coat

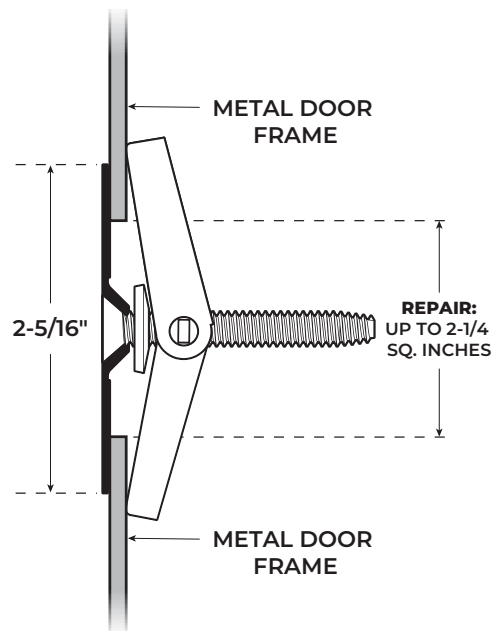

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



NGP-GAP-FP180-225-PCS-0725-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH