



GAP90-ME

Meeting Edge and Perimeter Gap Solution – Wood & Hollow Metal

PRODUCT CUT SHEET

Application Certified for Fire Doors and Frames with Excessive Clearance up to 3/8".



- Application Certified for Fire-Rated Hollow Metal Doors, Frames and Wood Doors with Excessive Clearances up to 3/8"
- Non-Handed
- Certified for Use on Doors with Surface/Concealed Vertical Rod Exit Devices or Manual/Automatic Flush Bolts (*see Installation Instructions*)
- Door Removal Not Required
- Can be Field-Modified to Match-Fit Varying Gaps Along Height or Width of the Door (*see installation instructions*)
- Patented: US Patent US 11,885,175 B2

PRODUCT CONSISTS OF:

- + Formed Metal Edge, 20-Gauge Steel, Embossed with UL Mark
- + Hardware Pack: #10 x 3/4" FHPH SS TEK
#10 x 2 1/2" FHPH SS SMS
- GapGuard Fire Caulk (*see Installation Instructions*)
- Sizes: 84" and 96"

FINISH:

Primer Gray, Powder Coat



SPECIAL NOTES:



- 90-Minute Rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C Wood or Hollow Metal Fire Doors.
- An NGP Strike Shim 9275 or 9225 may also be Required for Proper Latchbolt Engagement.
- Certified for On-site Modifications Around Strike Location.
- If Fire Pins are used, it is Recommended to Apply Metal Edge to Door with Fire Pin Receiver, Ensuring Receiver is Flush with Metal Edge.
- To Retain UL Certification, the Gap90-ME must be Installed using GapGuard Fire Caulk on wood door applications.

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

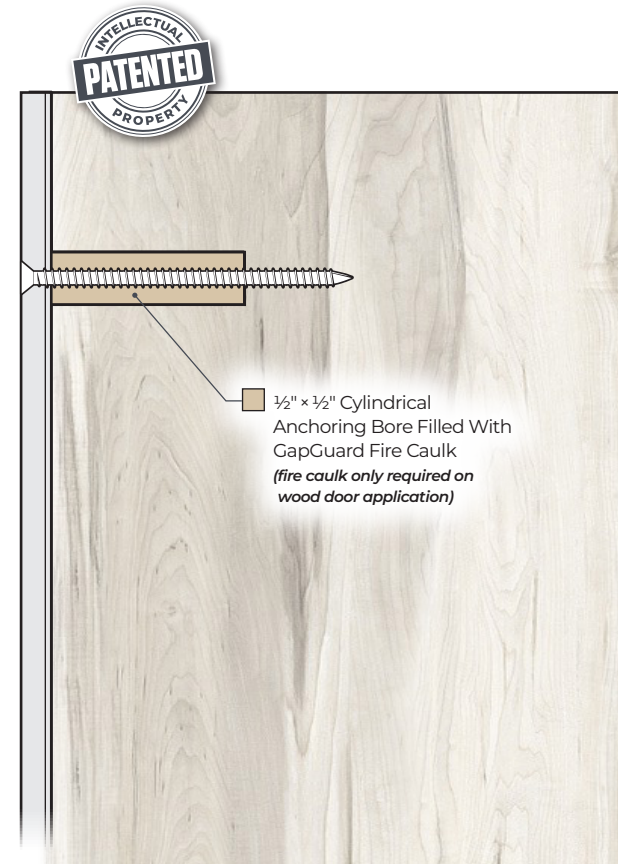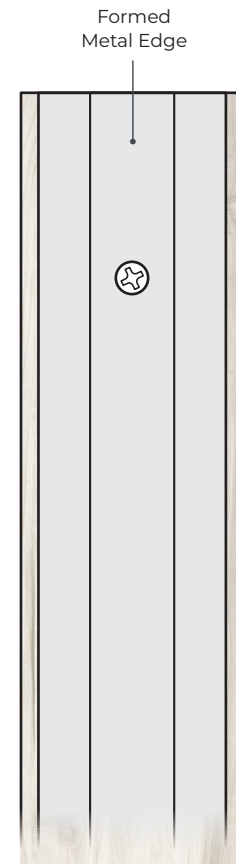

NGP-GAP-GAP90-ME-PCS-0726-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH