

HP90-CYL

CYLINDRICAL HARDWARE PREP FILLER




UL CERTIFIED FOR USE IN
THE US AND CANADA

**UL Certified Solution for Fire Doors When
Either Removing Existing Hardware and/or
Using a New Hardware Type Over Existing
Hardware Preps.**


- Application Certified on both Hollow Metal and Wood Fire-Rated Doors, up to 90 Minutes
- Certified for Filling Cylindrical Lockset Cavities
- Patented: US Patent 11,959,332 B2



WOOD DOOR: INSTALLED VIEW

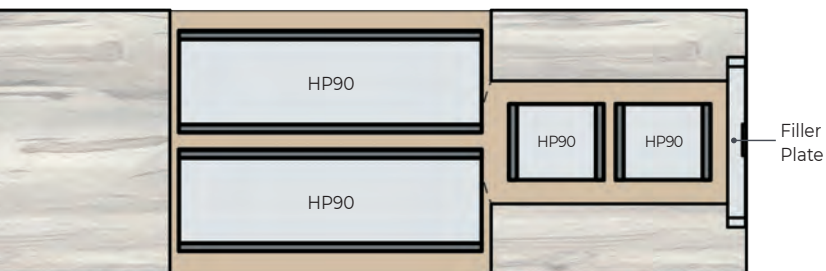

STEEL DOOR: INSTALLED VIEW

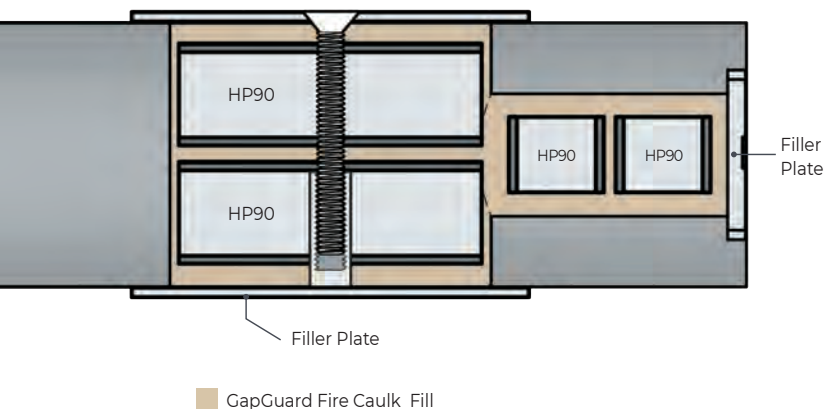

PRODUCT CONSISTS OF:

- + Fire-Rated Panels:
 - HP90 – 2.0
 - HP90 – 1.0
 - HP90 – 0.5
- + Steel Filler Plates, Powder Coated, Primer Gray, Embossed with UL Mark
 - HP90-RDCP, Filler Plate
 - HP90-CEF1000, Edge Filler Plate
 - HP90-SF2750, Strike Filler Plate
 - HP90-SF4875, Strike Filler Plate
- + Hardware Pack
 - #10-32 x 1 3/4" FHPH SS Machine Screw
 - #8 x 3/4" FHPH SS Combo Screw
 - #12 x 1" FHPH SS Combo Screw
 - #8 x 3/4" FHPH SS SMS
 - #12 x 1" FHPH SS SMS
- + GapGuard Fire Caulk
(see *Installation Instructions*)



POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY



SPECIAL NOTES:

- 90-Minute Rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C Wood or Hollow Metal Fire Doors
- To Retain UL Certification, the HP90-MORT must be Installed using GapGuard Fire Caulk