

# NEOPRENE BULB SEALS

All Neoprene Seals This Section:



- Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment



## 137NA

Anodized Aluminum  
Neoprene Bulb  
Perimeter Seal




| PRODUCT# | SUFFIX | FINISH                       |
|----------|--------|------------------------------|
|          | A      | Anodized Aluminum            |
|          | DKB    | Dark Bronze / Black Anodized |
|          | None   | Mill Aluminum                |

Neoprene is Black  
Polyurethane is Black

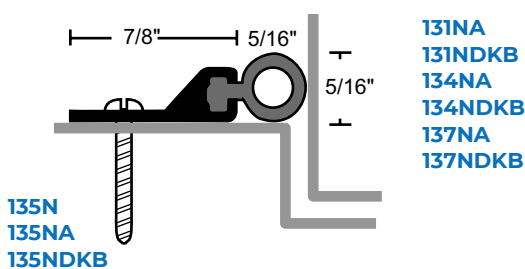


135N  
135NA  
135NDKB

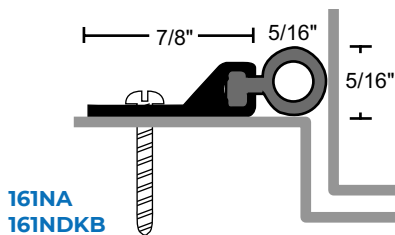

161NA  
161NDKB

.07 Aluminum for Military Specs

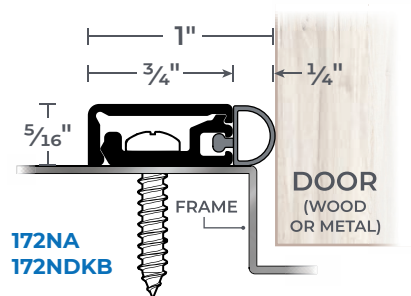


172NA  
172NDKB

All Polyurethane  
Seals this Section:




# POLYURETHANE SEALS


- Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -76°F to 275°F
- #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment



150UA  
150UDKB

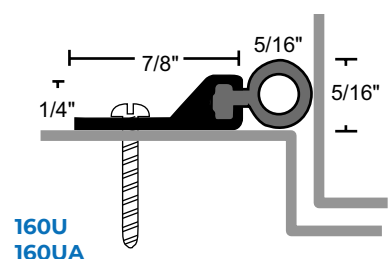

160U  
160UA  
160UDKB



161UA  
161UDKB

.07 Aluminum for Military Specs