NEOPRENE BULB SEALS

All Neoprene Seals This Section:


- Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment

137NA
Anodized Aluminum
Neoprene Bulb
Perimeter Seal




PRODUCT# SUFFIX	FINISH
A	Anodized Aluminum
DKB	Dark Bronze / Black Anodized
None	Mill Aluminum


Neoprene is Black
Polyurethane is Black



135N
135NA
135NDKB




131NA
131NDKB
134NA
134NDKB
137NA
137NDKB

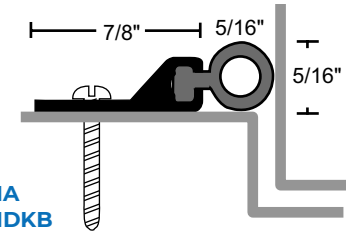

161NA
161NDKB

.07 Aluminum for Military Specs

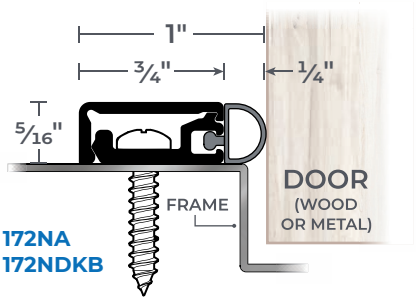


172NA
172NDKB


POLYURETHANE SEALS

All Polyurethane Seals this Section:


- Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -76°F to 275°F
- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment

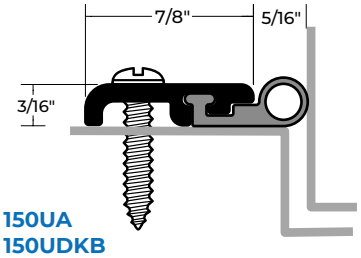

150UA
150UDKB

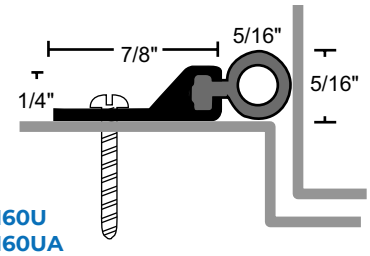

160U
160UA
160UDKB



161UA
161UDKB

.07 Aluminum for Military Specs