


## Five Knuckle Heavy Weight Wide Throw Series

**Recommended for use on high frequency and/or heavy wood or metal doors in schools, hospitals or other public buildings where heavy traffic is experienced and it is necessary to open the door around a large reveal.**

**T4A3386**

**T4A3786**

- Heavy weight hinges should be used on all extra heavy doors or those exposed to high frequency use
- T4A3386 – Stainless steel base
- T4A3786 – Steel base material
- For Beveled Edge, where doors are beveled on hinge side, specify T4A4386 or TA4786
- For available finishes see page 28

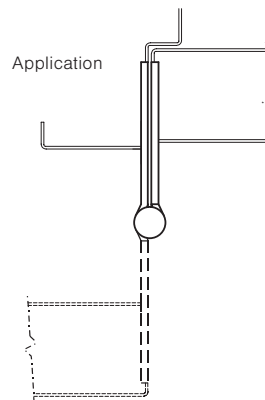

| No.     | ANSI Cross Reference | Base Material | Weight |
|---------|----------------------|---------------|--------|
| T4A3386 | A5111                | Stainless     | HVY    |
| T4A3786 | A8111                | Steel         | HVY    |

### Specifications

| Inches      | mm            | Gauge | No. of Holes | Fasteners   |            |
|-------------|---------------|-------|--------------|-------------|------------|
|             |               |       |              | Machine     | Wood       |
| 4 1/2" x 5" | 114.3 x 127   | .180  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |
| 4 1/2" x 6" | 114.3 x 152.4 | .180  | 6            | 1/2 x 10-24 | 1 1/4 x 12 |
| 4 1/2" x 7" | 114.3 x 177.8 | .180  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |
| 4 1/2" x 8" | 114.3 x 203.2 | .180  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |
| 5" x 6"     | 127 x 152.4   | .190  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |
| 5" x 7"     | 127 x 177.8   | .190  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |
| 5" x 8"     | 127 x 203.2   | .190  | 8            | 1/2 x 12-24 | 1 1/4 x 12 |

**Approved for NFPA 80 fire rated openings**

### Options:

| Code       | Description                                                     |
|------------|-----------------------------------------------------------------|
| <b>NRP</b> | Non-Removable Pin                                               |
| <b>T4B</b> | Ball Bearing                                                    |
| <b>TCA</b> | Concealed Bearing                                               |
| <b>RC</b>  | Round Corner – 1/4" radius furnished unless specified otherwise |
| <b>HT</b>  | Hospital Tip                                                    |
| <b>BT</b>  | Ball Tip                                                        |
| <b>ST</b>  | Steeple Tip                                                     |
| <b>SSF</b> | Safety Stud Feature                                             |
| <b>QC</b>  | ElectroLynx® Hinge – 4, 8 or 12 wire available*                 |
| <b>CC</b>  | Concealed Circuit – 4, 8 or 12 wire available*                  |
| <b>MM</b>  | Magnetic Monitoring                                             |

\* QC and CC options available on hinges up to 6" wide.

**McKinney®**  
**ASSA ABLOY**

Experience a safer  
and more open world

FM-13

McKinney is a brand associated with ASSA ABLOY Accessories and Door Controls Group, Inc. Copyright © 2012-2025, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

800-346-7707 | [www.mckinneyhinge.com](http://www.mckinneyhinge.com)  
Check the web site for the up-to-date catalog