NEOPRENE SPONGE SEALS

All Products on This Page:


- Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell Advanced Elastomeric Foam
- Very Good Abrasion Resistance, Tensile Strength and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature Range -81°F to 275°F
- Good Resistance to Ozone, Sunlight and Aging
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment
- Patent Pending Microcellular EPDM

108NA
Anodized Aluminum
Neoprene Sponge
Seal




PRODUCT# SUFFIX	FINISH
A	Anodized Aluminum
B	Black Anodized
DKB	Dark Bronze


Neoprene is Black




110NA
110NB
110NDKB
Patent Pending
BHMA CERTIFIED



120NA
120NB
120NDKB
Patent Pending
BHMA CERTIFIED




127NA
127NB
127NDKB
Patent Pending
BHMA CERTIFIED

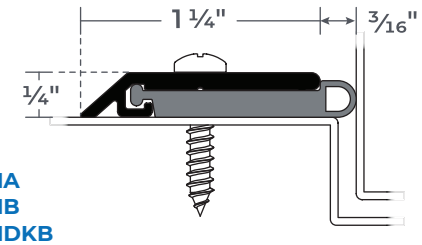

130NA
130NB
130NDKB
Patent Pending
BHMA CERTIFIED

122NA
122NB
122NDKB
133NA
133NB
133NDKB
BHMA CERTIFIED

165NA
165NB
165NDKB

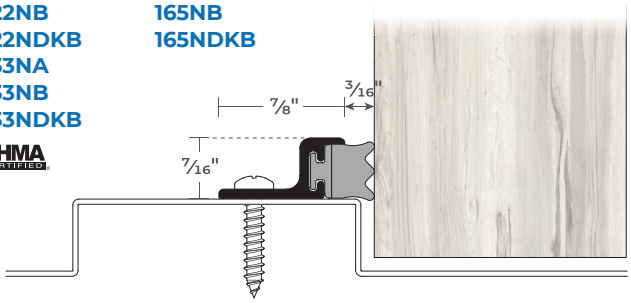

108NA

