
NYLON BRUSH SEALS


- Synthetic Polymer: Polyamide
- Excellent Abrasion Resistance, Flexibility and Memory
- Moisture-Resistant
- Retains Insecticides Well
- Temperature Range -70°F to 425°F
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold, in Most Common Profiles as Indicated by BHMA Certified Symbol
- REACH and RoHS Compliant
- Not Effective Against Water Penetration
- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment

PRODUCT# SUFFIX	INSERT	FINISH
A	Gray Brush*	Anodized Aluminum
B	Black Brush	Black Anodized
DKB	Black Brush	Dark Bronze
None	Gray Brush*	Mill Aluminum

-BB = Black Brush




A626A
A626A-BB
A626B
A626DKB





A625A
A625A-BB
A625B
A625DKB


603A
603A-BB
603B
603DKB



602A
602A-BB
602B
602DKB




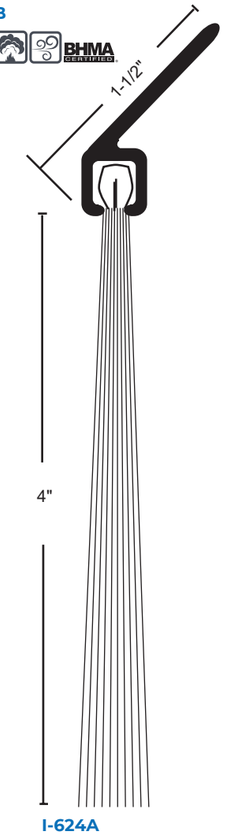




D648
D648-BB
D648B
D648DKB


* Up To 3 Hours Metal Doors, 1 Hour Wood Doors



D620A
D620A-BB
D620B
D620DKB

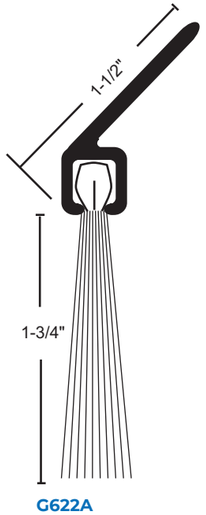


G622A
G622A-BB
G622B
G622DKB

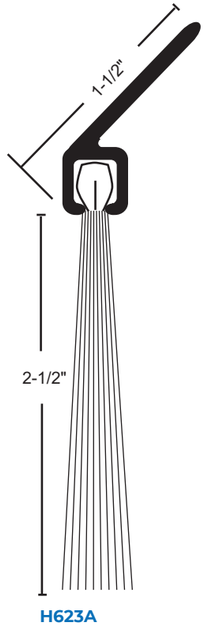

H623A
H623A-BB
H623B
H623DKB

I-624A
I-624A-BB
I-624B
I-624DKB

NYLON BRUSH SEALS

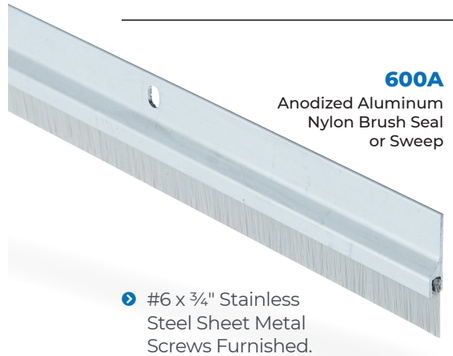

600A
Anodized Aluminum
Nylon Brush Seal
or Sweep

- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished. Screw Holes Slotted for Adjustment.




B606A
B606A-BB
B606B
B606DKB



600
600-BB
600A
600A-BB
600B
600DKB




601
601-BB
601A
601A-BB
601B
601DKB



A605A
A605A-BB
A605B
A605DKB



OV634A
OV634A-BB
OV634B
OV634DKB



OV633A
OV633A-BB
OV633B
OV633DKB



H612A
H612A-BB
H612B
H612DKB



I-615A
I-615A-BB
I-615B
I-615DKB

G611A
G611A-BB
G611B
G611DKB




H614A
H614A-BB
H614B
H614DKB



I-616A
I-616A-BB
I-616B
I-616DKB



C607A
C607A-BB
C607B
C607DKB



D608A
D608A-BB
D608B
D608DKB



G610A
G610A-BB
G610B
G610DKB