L-700-RX, AFDL

No Vision Door Louver

PRODUCT CUT SHEET

Anemostat
DOOR PRODUCTS

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

For 1 ¾" Thick Doors

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Inverted "V" Design
- Blades 24 Ga. Steel; Hemmed Edges
- Countersunk Mounting Screw-Holes
- Minimum 6" Width x 4" Height
  Maximum 46" Width x 88" Height
- #8 x ¾" Phillips Head SMS
- Available in Uneven and Fractional Sizes
- Free Area 55%
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options - See Color Chart on *ngp.com*
- Aluminum Insect Screen - 22 Ga. ⅛" Square Perforated Sheet Installed on Exterior Side Unless Requested Otherwise: "Supplied Loose for Interior Side Installation"
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating (Not Available on Insect Screen)

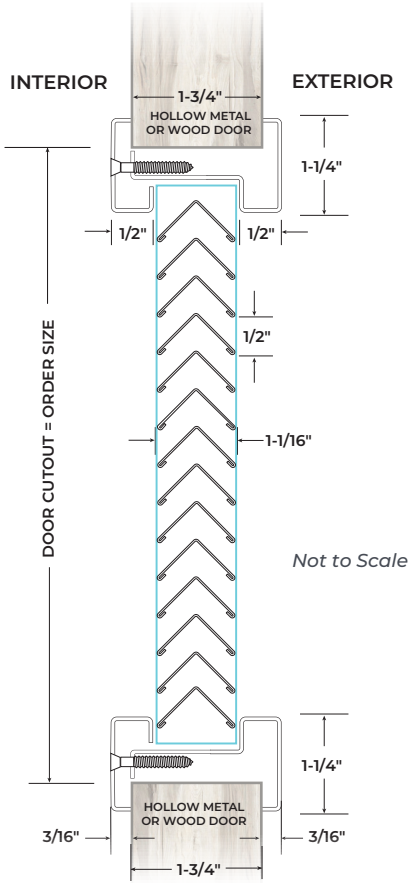



Undersized ⅛" for clearance

Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH