


SX/SV Series

Commercial Locks

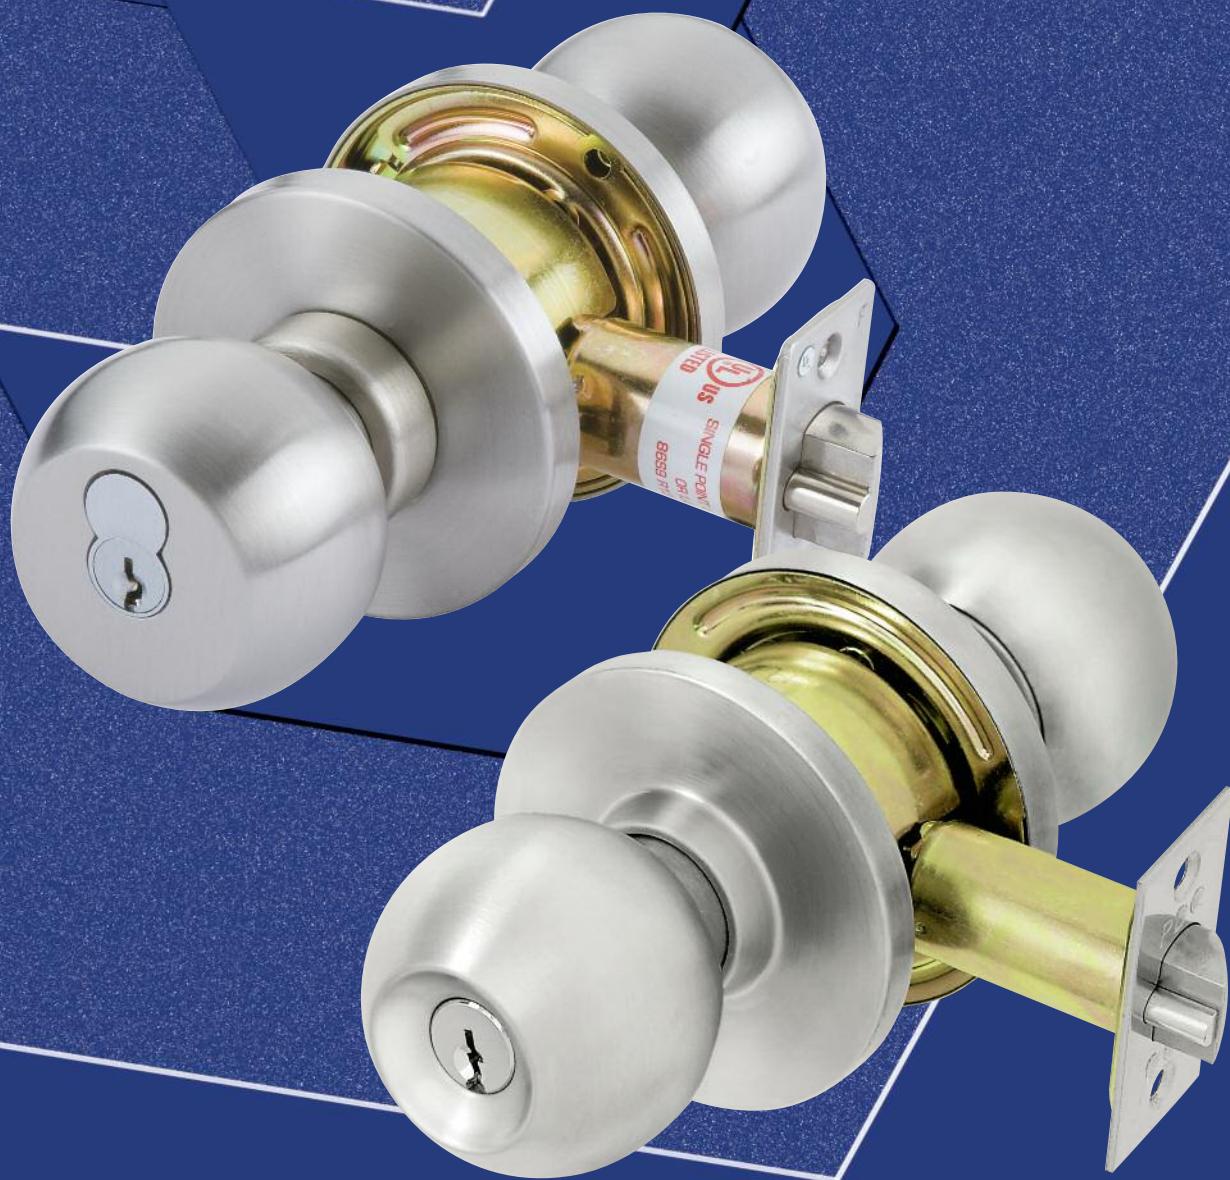

SX SERIES

COMMERCIAL

GRADE 1 CYLINDRICAL

SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be SX Series from PDQ Industries, Inc., Leola, Pennsylvania. Lock will conform to ANSI A156.2-2003 Grade 1, surpassing 800,000 cycles, with a five-year manufacturer's limited warranty. 3 hours of fire testing qualified and stainless

steel latch bolt. Lock fits ANSI 161 cut-out. Lockset to be fully adjustable for 1-3/8" to 2" doors. Lock will accommodate keyways of major manufacturers.

SPECIFICATIONS – SX Series

FOR DOORS: 1-3/8" to 2" thick.
DOOR PREP: Fits standard 161 door prep.
BACKSET: 2-3/4", 2-3/8", 5".
CASE: Steel, yellow chromate plate.
FRONT: 2-1/4" x 1-1/8" or 2-1/4" x 1" / Stainless steel or wrought bronze.
STRIKE: 4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike optional.
Stainless steel or wrought bronze.
UL F LATCHBOLT: 3 hours of fire testing qualified, stainless steel latch bolt
TRIM: CQ ball knob. Stainless steel or wrought brass.
KEYWAYS: Available in keyways of most major manufacturers.
CYLINDER: Supplied standard to accommodate SFIC core.
(Cylinder not included)
KEYING: Standard core is available and can be MK, CMK, GMK, or CK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
FINISHES: US32D(630).
CERTIFICATIONS: Meets ANSI/BHMA A156.2-2003 Grade 1, surpassed 800,000 cycles.
WARRANTY: Five-year limited warranty.

SX SERIES



SV SERIES

COMMERCIAL

GRADE 2 CYLINDRICAL

SUGGESTED ARCHITECTURAL SPECIFICATIONS

Lockset will be SV Series from PDQ Industries, Inc., Leola, Pennsylvania. Lock will conform to ANSI A156.2, Series 4000, Grade 2, and U.L./U.L.C. Listed with a one-year

manufacturer's limited warranty. Fits ANSI 161 cut-out. Lockset to be fully adjustable for 1-3/8" to 1-3/4" doors. Lock will accommodate keyways of major manufacturers.

SPECIFICATIONS – SV Series

FOR DOORS:	1-3/8" to 1-3/4" thick.
DOOR PREP:	Fits standard 161 door prep.
BACKSET:	2-3/4", 2-3/8", 5".
CASE:	Steel, yellow chromate plate.
FRONT:	2-1/4" x 1-1/8" or 2-1/4" x 1" /Stainless steel or wrought bronze.
STRIKE:	4-7/8" x 1-1/4" (ASA). "T" or "FL" Strike optional. Stainless steel or wrought bronze.
LATCHBOLT:	1/2" throw. Solid brass. Adjustable for beveled doors.
TRIM:	CQ ball knob. Stainless steel or wrought brass.
KEYS:	Two change keys per lock.
KEYWAYS:	Available in keyways of most major manufacturers.
CYLINDER:	Brass 6-pin cylinder keyed to 5 pins.
KEYING:	Can be MK, CMK, GMK, or CK. Available Zero Bitted (KO), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
FINISHES:	US3(605), US10(612), US10B(613), US32(629), US32D(630).
CERTIFICATIONS:	► Complies with ANSI A156.2, Series 4000, Grade 2. ► U.L./U.L.C. Listed for "A" label (3 hour) single swing doors (4'0" x 8'0").
WARRANTY:	One-year limited warranty.

SV SERIES




SX SERIES
COMMERCIAL GRADE 1
FUNCTION CHART

FUNCTION	FUNCTION NO.	INSIDE	OUTSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	SX 116			<ul style="list-style-type: none"> • Latchbolt operated by both knobs • Outside knob locked or unlocked by turn/push button • Inside knob always free • Pushing and turning button locks outside knob requiring use of key until button is manually unlocked • Pushing button only locks outside knob until unlocked with key or inside knob is turned 	F81-2
Passage	SX 126			<ul style="list-style-type: none"> • Latchbolt operated by both knobs 	F75-2
Entry	SX 182			<ul style="list-style-type: none"> • Latchbolt operated by knob from either side or key in outside knob • Outside knob locked by push button on inside • Outside knob unlocked by key from outside 	F82
Bathroom Privacy	SX 176			<ul style="list-style-type: none"> • Latchbolt operated by knob from either side • Latchbolt operated by both knobs • Push button in inside knob locks outside knob • Inside knob or closing door releases button • Emergency opening from outside 	F76-2

NOTE: Other functions available by Special Order.

SV SERIES
COMMERCIAL GRADE 2
FUNCTION CHART

FUNCTION	FUNCTION NO.	INSIDE	OUTSIDE	FUNCTION DESCRIPTION	ANSI NO.
Storeroom	SV 115			<ul style="list-style-type: none"> • Latchbolt operated from outside by key, inside by knob • Outside knob is rigid at all times • Inside knob always free for immediate exit • Deadlocking (guarded) latchbolt 	F86-2
Entrance	SV 116			<ul style="list-style-type: none"> • Latchbolt operated by both knobs • Outside knob locked or unlocked by turn/push button • Inside knob always free • Pushing and turning button locks outside knob requiring use of key until button is manually unlocked • Pushing button only locks outside knob until unlocked with key or inside knob is turned 	F81-2
Closet/ Communicating	SV 125			<ul style="list-style-type: none"> • Blank plate outside • Inner knob always free • Deadlocking (guarded) latchbolt 	
Passage	SV 126			<ul style="list-style-type: none"> • Latchbolt operated by both knobs 	F75-2
General Entrance	SV 137			<ul style="list-style-type: none"> • Latchbolt operated by both knobs • Key on either side locks or unlocks • Deadlocking (guarded) latchbolt 	
Classroom, Storage	SV 148			<ul style="list-style-type: none"> • Latchbolt operated from outside by knob except when locked from outside by key • Latchbolt operated from inside by knob at all times • Deadlocking (guarded) latchbolt 	F84-2
Exit or Twin Communicating	SV 150			<ul style="list-style-type: none"> • Blank plate outside • Key inside locks or unlocks inside knob • No outside operation • Deadlocking (guarded) latchbolt 	
Hotel Room	SV 161			<ul style="list-style-type: none"> • Outside knob rigid at all times • Latchbolt operated from outside by guest key, master key or grand master key, except when shut-out button is used • Emergency key operates latchbolt at all times • Outside is equipped with indicator pin • Inside is always free • Deadlocking (guarded) latchbolt 	F93-2
Bathroom Privacy	SV 176			<ul style="list-style-type: none"> • Latchbolt operated by both knobs • Push button in inside knob locks outside knob • Inside knob or closing door releases button • Emergency opening from outside 	F76-2
Patio	SV 177			<ul style="list-style-type: none"> • Latchbolt operated by both knobs • Push button in inside knob locks outside knob • Inside knob or closing door releases button • Deadlocking (guarded) latchbolt 	
Dummy	SV 211 SV 205			<ul style="list-style-type: none"> • Single or double pull knob(s) • One or both side(s) • No mechanical operation • Surface mounted (SV 211) • 2-1/8' bored hole (SV 205) 	

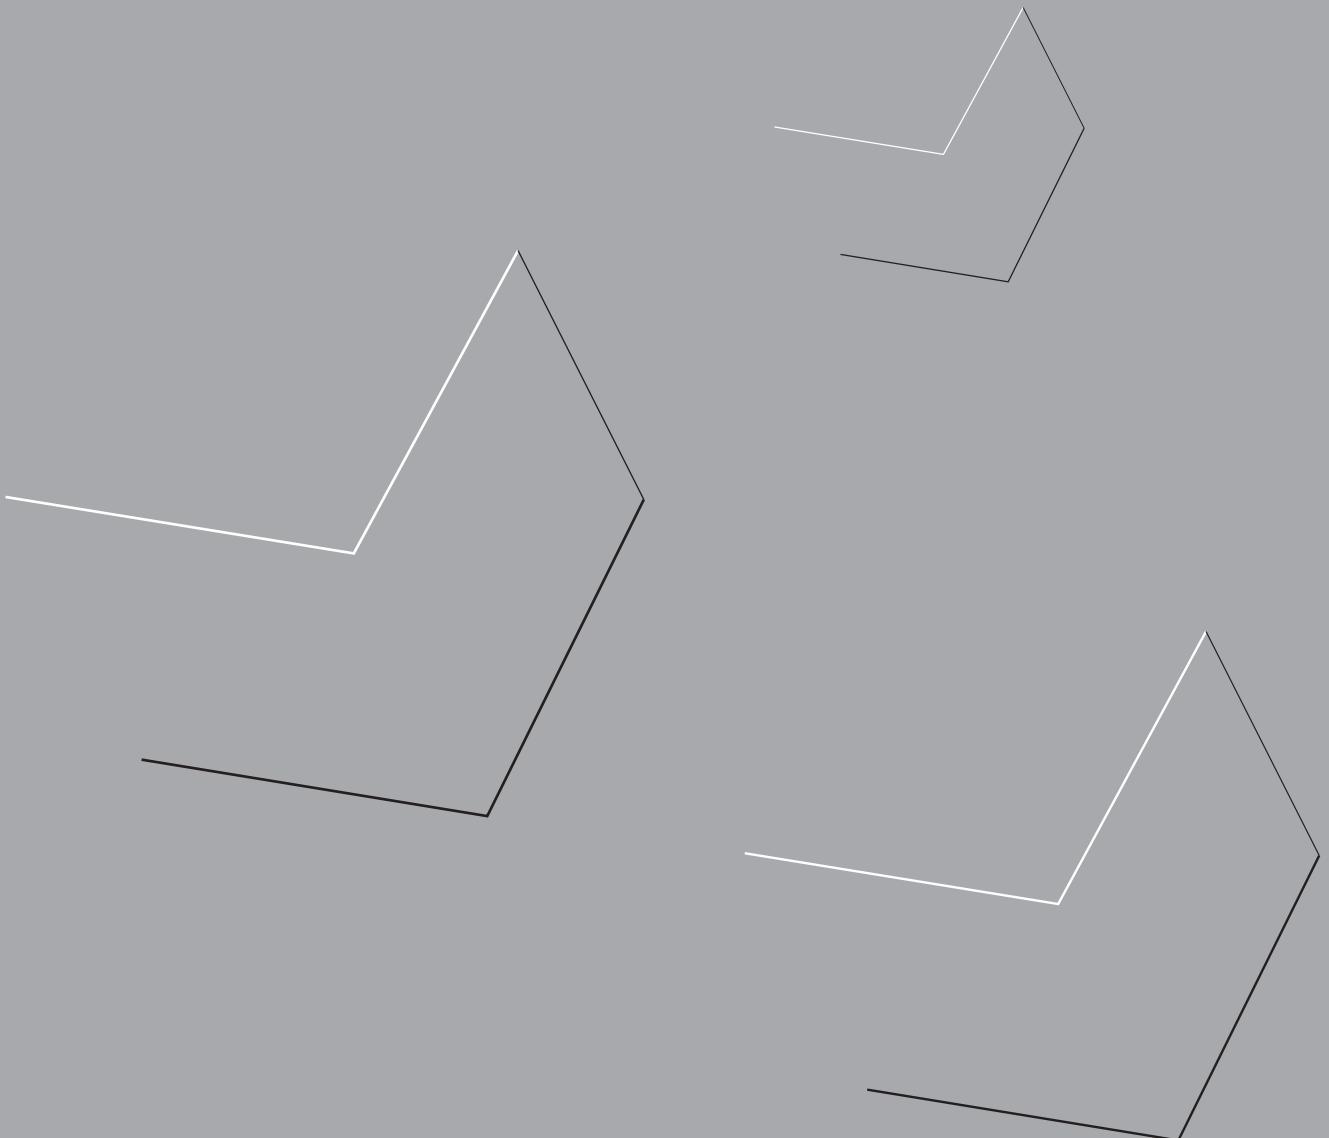

PO Box 507 2754 Creek Hill Road Leola PA 17540
800 441 9692 • 717 656 4281 • 717 656 6892 Fax
www.pdqlocks.com

PDQ'S SX/SV Series Brochures are now printed entirely on Forest Stewardship Council™ certified paper. FSC Certification ensures that the paper used in this catalog contains fiber from well-managed and responsibly harvested forests that meet strict environmental and socioeconomic standards. We're proud to be one of the first hardware manufacturers in the country to make this significant move to help our environment. The FSC logo on our brochure signals not only FSC Certification, but also PDQ'S commitment to improving the environment.

