



# 9245WH

Intumescent Door Shoe with Nylon Brush

## PRODUCT CUT SHEET

**Gap Solution for Excessive Fire Door  
Bottom Undercut/Clearance up to 45 Minutes**

**NGP-Edge® Intumescent Door Shoe.**

**UL Certified for Door Bottom Gaps —  
Measuring up to 1 1/2".**





UL CERTIFIED FOR USE IN  
THE US AND CANADA

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps
- ▶ Synthetic Polymer: Polyamide
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame Resistant
- ▶ Temperature Range -70°F to 425°F
- ▶ Up to 45-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x 3/4" Stainless Steel SMS Furnished

### FINISHES:

|           |                            |             |
|-----------|----------------------------|-------------|
| 9245WHA   | Anodized Aluminum          | Gray Brush  |
| 9245WHDKB | Dark Bronze/Black Anodized | Black Brush |

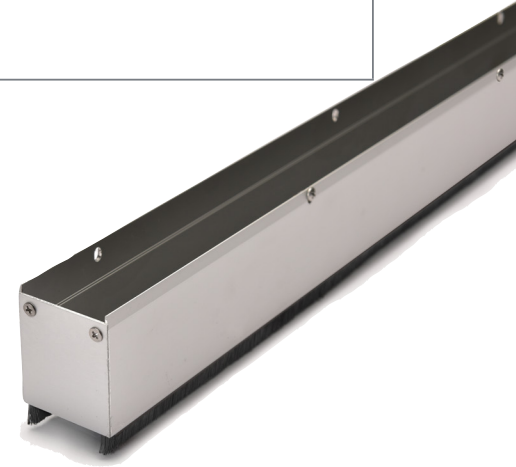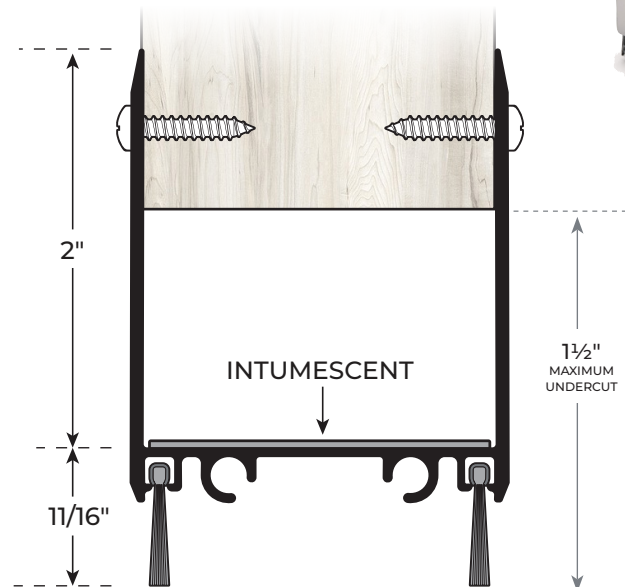

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

NGP-GAP-9245WH-PCS-0126-A

## NATIONAL GUARD PRODUCTS, INC.

### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874  
**Email:** info@ngp.com

**Quotes:** quotes@ngp.com  
**Orders:** orders@ngp.com

**ngp.com**  
1-800-NGP-RUSH